

JC957 U.S. PTO
10/31/00

23932
PATENT TRADEMARK OFFICE

11-02-00

Patent Application
Docket No. 34650-608PT

JC918 U.S. PTO
09/703494
10/31/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re patent application of: Nils Rydbeck

For: ELECTRONIC PEN WITH INK ON/INK OFF FUNCTION AND PAPER TOUCH SENSING

BOX PATENT APPLICATION
Assistant Commissioner
for Patents
Washington, D.C. 20231

CERTIFICATE OF MAILING BY EXPRESS MAIL

"EXPRESS MAIL" Mailing Label No. EL 524 960 862 US

Date of Deposit: 10/31/2000

I hereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231

Type or Print Name: Carolyn Bova

Signature: Carolyn Bova

Sir:

PATENT APPLICATION TRANSMITTAL LETTER

Transmitted herewith for filing, please find the following:

- X Specification, claims and abstract of the above-referenced patent application (total of 60 pages)
- X 9 sheet(s) of drawing(s) (___formal/ x informal).
- X Combined Declaration and Power of Attorney (unexecuted).
- ___ An Assignment of the invention to: Telefonaktiebolaget LM Ericsson (publ)
- ___ A verified statement claiming small entity status under 37 CFR 1.9 and 1.27.
- X Other (specify): Acknowledgment postcard.
- ___ This application is a:
 - ___ Continuation
 - ___ Divisional
 - ___ Continuation-In-Part

09703494-103400

of prior copending parent application Serial No. _____ filed on _____
now pending.

Please amend the application to insert the following line in the beginning of
specification:

--This application is a Continuation of prior application Serial No. _____ filed on
_____, now pending.--

In the event that a petition to extend time under 37 CFR 1.136 is necessary in the parent
application to maintain copendency for this application, a petition for an extension of the necessary
time to maintain copendency is hereby requested for the parent application and the Commissioner
is hereby authorized to debit our Account Number 10-0447 for the necessary fees.

The filing fee has been calculated as shown below:

	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$710
TOTAL CLAIMS	24-20	4	\$18	72
INDEPENDENT CLAIMS	4-3	1	\$80	80
MULTIPLE DEPENDENT CLAIM(S) PRESENTED			\$260	
TOTAL FEES:				\$862
Deduct one-half of fee for Small Entity				-
ASSIGNMENT RECORDAL FEE			\$40	
TOTAL AMOUNT DUE:				\$862

___ Please charge my Deposit Account No. 10-0447 in the amount of \$ _____

___ Check(s) in the amount of \$ _____ is/are attached. Please charge any deficiency
or credit any overpayment to Deposit Account No. 10-0447.

___ The Commissioner is hereby authorized to charge payment of the following fees during the
pendency of this application or credit any overpayment to Deposit Account No. 10-0447.


___ Any patent application processing fees under 37 CFR 1.17 and under 37 CFR
1.20(d).

___ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance,
pursuant to 37 CFR 1.311(b).



Smyk Rath

Parameter	Value	Unit	Parameter	Value	Unit
Initial concentration	1.0	g/L	Initial concentration	1.0	g/L
Initial pH	7.0		Initial pH	7.0	
Temperature	25	°C	Temperature	25	°C
Time	0-24	h	Time	0-24	h
Agitation speed	150	rpm	Agitation speed	150	rpm
Batch size	100	mL	Batch size	100	mL
Adsorbent dose	0.5	g/L	Adsorbent dose	0.5	g/L
Adsorbent type	Activated carbon		Adsorbent type	Activated carbon	
Adsorbent source	Commercial		Adsorbent source	Commercial	
Adsorbent particle size	150-200	µm	Adsorbent particle size	150-200	µm
Adsorbent surface area	1000	m ² /g	Adsorbent surface area	1000	m ² /g
Adsorbent pore volume	0.5	cm ³ /g	Adsorbent pore volume	0.5	cm ³ /g
Adsorbent density	0.5	g/cm ³	Adsorbent density	0.5	g/cm ³
Adsorbent porosity	0.5		Adsorbent porosity	0.5	
Adsorbent surface functional groups	-OH, -COOH, -NH ₂		Adsorbent surface functional groups	-OH, -COOH, -NH ₂	
Adsorbent surface charge	0		Adsorbent surface charge	0	
Adsorbent surface zeta potential	0	mV	Adsorbent surface zeta potential	0	mV
Adsorbent surface roughness	0.5		Adsorbent surface roughness	0.5	
Adsorbent surface area (BET)	1000	m ² /g	Adsorbent surface area (BET)	1000	m ² /g
Adsorbent pore volume (BET)	0.5	cm ³ /g	Adsorbent pore volume (BET)	0.5	cm ³ /g
Adsorbent density (BET)	0.5	g/cm ³	Adsorbent density (BET)	0.5	g/cm ³
Adsorbent porosity (BET)	0.5		Adsorbent porosity (BET)	0.5	
Adsorbent surface functional groups (BET)	-OH, -COOH, -NH ₂		Adsorbent surface functional groups (BET)	-OH, -COOH, -NH ₂	
Adsorbent surface charge (BET)	0		Adsorbent surface charge (BET)	0	
Adsorbent surface zeta potential (BET)	0	mV	Adsorbent surface zeta potential (BET)	0	mV
Adsorbent surface roughness (BET)	0.5		Adsorbent surface roughness (BET)	0.5	
Adsorbent surface area (BET) (m ² /g)	1000		Adsorbent surface area (BET) (m ² /g)	1000	
Adsorbent pore volume (BET) (cm ³ /g)	0.5		Adsorbent pore volume (BET) (cm ³ /g)	0.5	
Adsorbent density (BET) (g/cm ³)	0.5		Adsorbent density (BET) (g/cm ³)	0.5	
Adsorbent porosity (BET)	0.5		Adsorbent porosity (BET)	0.5	
Adsorbent surface functional groups (BET)	-OH, -COOH, -NH ₂		Adsorbent surface functional groups (BET)	-OH, -COOH, -NH ₂	
Adsorbent surface charge (BET)	0		Adsorbent surface charge (BET)	0	
Adsorbent surface zeta potential (BET)	0	mV	Adsorbent surface zeta potential (BET)	0	mV
Adsorbent surface roughness (BET)	0.5		Adsorbent surface roughness (BET)	0.5	
Adsorbent surface area (BET) (m ² /g)	1000		Adsorbent surface area (BET) (m ² /g)	1000	
Adsorbent pore volume (BET) (cm ³ /g)	0.5		Adsorbent pore volume (BET) (cm ³ /g)	0.5	
Adsorbent density (BET) (g/cm ³)	0.5		Adsorbent density (BET) (g/cm ³)	0.5	
Adsorbent porosity (BET)	0.5		Adsorbent porosity (BET)	0.5	
Adsorbent surface functional groups (BET)	-OH, -COOH, -NH ₂		Adsorbent surface functional groups (BET)	-OH, -COOH, -NH ₂	
Adsorbent surface charge (BET)	0		Adsorbent surface charge (BET)	0	
Adsorbent surface zeta potential (BET)	0	mV	Adsorbent surface zeta potential (BET)	0	mV
Adsorbent surface roughness (BET)	0.5		Adsorbent surface roughness (BET)	0.5	
Adsorbent surface area (BET) (m ² /g)	1000		Adsorbent surface area (BET) (m ² /g)	1000	
Adsorbent pore volume (BET) (cm ³ /g)	0.5		Adsorbent pore volume (BET) (cm ³ /g)	0.5	
Adsorbent density (BET) (g/cm ³)	0.5		Adsorbent density (BET) (g/cm ³)	0.5	
Adsorbent porosity (BET)	0.5		Adsorbent porosity (BET)	0.5	
Adsorbent surface functional groups (BET)	-OH, -COOH, -NH ₂		Adsorbent surface functional groups (BET)	-OH, -COOH, -NH ₂	
Adsorbent surface charge (BET)	0		Adsorbent surface charge (BET)	0	
Adsorbent surface zeta potential (BET)	0	mV	Adsorbent surface zeta potential (BET)	0	mV
Adsorbent surface roughness (BET)	0.5		Adsorbent surface roughness (BET)	0.5	
Adsorbent surface area (BET) (m ² /g)	1000		Adsorbent surface area (BET) (m ² /g)	1000	
Adsorbent pore volume (BET) (cm ³ /g)	0.5		Adsorbent pore volume (BET) (cm ³ /g)	0.5	
Adsorbent density (BET) (g/cm ³)	0.5		Adsorbent density (BET) (g/cm ³)	0.5	
Adsorbent porosity (BET)	0.5		Adsorbent porosity (BET)	0.5	
Adsorbent surface functional groups (BET)	-OH, -COOH, -NH ₂		Adsorbent surface functional groups (BET)	-OH, -COOH, -NH ₂	
Adsorbent surface charge (BET)	0		Adsorbent surface charge (BET)	0	
Adsorbent surface zeta potential (BET)	0	mV	Adsorbent surface zeta potential (BET)	0	mV
Adsorbent surface roughness (BET)	0.5</				

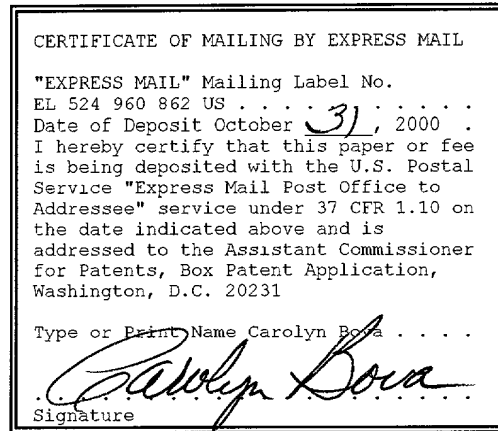

**ELECTRONIC PEN WITH INK ON/INK OFF
FUNCTION AND PAPER TOUCH SENSING**

REFERENCE TO EARLIER FILED PROVISIONAL APPLICATIONS

This patent application claims the benefit of
priority from, and incorporates by reference the entire
disclosure of, co-pending U.S. Provisional Patent

5 Application Serial Nos. 60/182,742, filed on February 16,
2000, 60/190,343, filed on March 16, 2000, and 60/192,662,
filed on March 28, 2000.

CROSS REFERENCE TO RELATED APPLICATION

The present application for patent is related to and
10 hereby incorporates by reference the subject matter

disclosed in U.S. Patent Application Serial Nos.

_____ (Attorney Docket No.34650-566PT),
entitled "Specially Formatted Paper Based Applications of
a Mobile Phone"; _____ (Attorney Docket

5 No.34650-569PT), entitled "Method and System for Using an
Electronic Reading Device as a General Application Input
and Navigation Interface"; _____ (Attorney
Docket No.34650-578PT), entitled "Predefined Electronic
Pen Applications in Specially Formatted Paper";

10 _____ (Attorney Docket No. 34650-579PT),
entitled "A System and Method for Operating an Electronic
Reading Device User Interface"; _____
(Attorney Docket No. 34650-601PT), entitled "Method and
System for Using an Electronic Reading Device on Non-paper
15 Devices"; _____ (Attorney Docket No. 34650-
602PT), entitled "Multi-layer Reading Device";

_____ (Attorney Docket No. 34650-604PT),
entitled, "Method and System for Configuring and Unlocking
an Electronic Reading Device"; _____ (Attorney
20 Docket No. 34650-606PT), entitled "Printer Pen";
_____ (Attorney Docket No. 34650-607PT),
entitled "Method and System for Electronically Recording
Transactions and Performing Security Function";

_____ (Attorney Docket No. 34650-654PT),
entitled "Method and System for Handling FIFO and Position
Data in Connection with an Electronic Reading Device";

_____ (Attorney Docket No. 34650-655PT),

5 entitled "Hyperlink Applications for an Electronic Reading
Device"; _____ (Attorney Docket No. 34650-

656PT), entitled "Measuring Applications for an Electronic
Reading Device"; _____ (Attorney Docket No.

10 _____ (Attorney Docket No. 34650-657PT), entitled "Method and System for Controlling
an Electronic Utility Device Using an Electronic Reading
Device"; and _____ (Attorney Docket No. 34650-

658PT), entitled "Positioning Applications for an
Electronic Reading Device"; and _____

15 _____ (Attorney Docket No. 34650-673PT), entitled "Method for
Sharing Information Between Electronic Reading Devices";
and in U.S. Provisional Patent Application Serial Nos.

_____ (Attorney Docket No. 34650-671PL),
entitled "Electronic Pen for E-Commerce Implementations";
and _____ (Attorney Docket No. 34650-672PL),

20 entitled "Electronic Pen Help Feedback and Information
Retrieval"; all filed concurrently herewith.

BACKGROUND OF THE INVENTION

Technical Field of the Invention

The present invention relates in general to the communications field, and in particular to an interaction
5 of an electronic reading device with an address pattern.

Description of Related Art

Numerous man-machine-interfaces (MMIs) exist for accepting user input and controlling user interaction with desktop and portable computers, personal digital
10 assistance (PDAs), mobile phones, and other types of electronic devices. For example, a keyboard can be used to accept typed input and other types of commands, a mouse or a track-ball can be used to provide relative motion input as well as various types of point-and-click
15 selections, a keypad can be used to provide input of numerical data and functional commands, navigational keys, or scrolling wheels can be used for scrolling lists or otherwise repositioning a cursor, voice recognition can be used for performing certain operations, and various types
20 of touchpads or touchscreens can be used to provide absolute positional coordinate inputs. Each type of

mechanism for accepting input and for supporting user interaction has benefits and disadvantages in terms of size, convenience, flexibility, responsiveness, and easy of use. Generally, the selection of a particular type of MMI is dependent upon the function of the application and the degree and type of interaction required.

With the ever expanding capabilities and availability of applications both on the Internet and the area of wireless technology, there continues to be a need to develop and provide new MMIs for accepting input and interacting with users. In particular, some of the existing technologies suffer from drawbacks or limitations, such as size and flexibility, that make them impractical and/or inconvenient to use in some situations. For example, MMIs that are typically used with mobile phones are not very fast and are not particularly user friendly, especially for sending long SMS messages or changing a lot of data in the device. Typically, long messages are entered using T9 (i.e., word predictive input), a keyboard attached to the phone (i.e., a chatboard), a pen on a touch sensitive screen, or a numeric keypad where each key has to be pressed more than once to enter certain letters. Each of these alternatives

suffer from a lack of speed and/or user-friendliness. By expanding the range of possible MMIs for supporting user interaction, application developers and end-users can have greater flexibility in the selection of input devices.

5 Preferably, any such new mechanisms will provide increased flexibility and will maximize user convenience. In addition, the development of new mechanisms for interacting with users can expand the realm of potential applications.

10 For example, while a keyboard typically provides a great deal of flexibility, particularly when it is used in connection with a mouse, a touchscreen, or other navigational device, its size makes it inconvenient in many cases, especially in the wireless context.

15 SUMMARY OF THE INVENTION

The present invention comprises a method and system for entering information electronically using an electronic pen. The electronic pen is used in connection with a specially formatted surface that includes an
20 address pattern designed such that a substantially exact position of the electronic pen relative to the address pattern can be determined by examining only a small

portion of the overall address pattern. In particular,
the electronic pen includes an optical detector for
detecting sequential positions of the electronic pen. In
one aspect of the invention, the electronic pen can

5 include a touch sensor for detecting whether a tip of the
electronic pen is in contact with the specially formatted
surface. When the electronic pen is in contact with the
surface, the detected positional data can be forwarded to
a processor for determining a relative position of the
10 electronic pen and/or can be stored in a memory.

Furthermore, the touch sensor can be sensitive to varying
amounts of force and can be used to select a particular
position on the specially formatted surface when an amount
of force greater than some predetermined threshold is
15 detected.

In another aspect of the invention, the electronic
pen can include a writing means that can be selectively
activated and deactivated. By using the electronic pen
with the writing means in an activated mode, handwritten
20 messages or drawings can be both written on the specially
formatted surface and electronic representations of the
messages or drawings can be stored or otherwise utilized
by the system. On the other hand, by using the electronic

pen with the writing means in a deactivated mode,
electronic representations of handwritten messages or
drawings can be generated while writing on a reusable data
entry sheet. Furthermore, when the electronic pen also
5 includes the touch sensor, contact between the tip of the
electronic pen and the surface can preferably be detected
regardless of whether the electronic pen is in an
activated or deactivated writing mode.

BRIEF DESCRIPTION OF THE DRAWINGS

10 For a more complete understanding of the present
invention, reference is made to the following detailed
description taken in conjunction with the accompanying
drawings wherein:

FIGURE 1 is a block diagram of a system in which an
15 electronic pen can be used as an input device;

FIGURE 2 is a schematic diagram of a system for
supporting use of the electronic pen described in
connection with FIGURE 1;

FIGURE 3 is an illustration of the protocol stacks
20 that can be used in the case of local communications
between the electronic pen and the electronic pen client;

FIGURE 4 is an illustration of protocol stacks that can be used when the electronic pen and the electronic pen client communicate with one another via an Internet connection;

5 FIGURE 5 is an illustration of a protocol stack for communications between the electronic pen client and each of the supporting entities when the electronic pen client is not located within a server on the Internet;

10 FIGURE 6 is an illustration of protocol stacks that are used for communications between the electronic pen client and each of the supporting entities when the electronic pen client is located on the Internet;

15 FIGURE 7 is a block diagram of the electronic pen logic that handles positions, strokes, actions, and grid descriptions;

FIGURE 8 is a block diagram of a state machine for the electronic pen control block shown in FIGURE 7;

FIGURE 9 is a block diagram of a state machine for the electronic pen client;

20 FIGURES 10A-10C are a message flow and signaling diagram illustrating the operation of the electronic pen system 2 shown and discussed in connection with FIGURE 2;

FIGURE 12 is an illustration of an example of a reusable phone settings entry sheet; and

DETAILED DESCRIPTION OF THE INVENTION

10

Then, using an electronic scanner pen that can detect the dots in the pattern, it is possible to detect the location of the pen with respect to the unique pattern. For example, when such a pen is used in connection with a specially formatted paper, the pen can detect its position (e.g., using a built in camera) by detecting a 3 mm by 3 mm portion of the pattern. By taking approximately 100 pictures per second, the pen is capable of determining its exact position to within 0.1 mm or less. This system can be used to provide user input, to facilitate user interaction, or to store handwritten notes or drawings. Moreover, by associating portions of the overall pattern with certain applications, such a system can be used to interact with wide variety of applications.

Referring now to FIGURE 1, there is illustrated an example of a system 2 in which an electronic pen can be used as an input device. The electronic pen includes an ink cartridge and is capable of writing in a typical fashion. The electronic pen 10, however, includes some type of sensor (e.g., a built-in camera) that is used for detecting an address pattern on a specially formatted piece of paper 12. In particular, the paper 12 is formatted with a small portion of a large address pattern

such that when the electronic pen 10 is used to write on or otherwise make marks on the paper 12, the writings or markings can be electronically detected and stored.

As an example, the paper 12 might constitute a form that can be used for sending an e-mail. Thus, the paper 12 might include a space for writing in the e-mail address of an intended recipient, a space for writing a subject of the e-mail, and a space for writing the body of the e-mail. As the electronic pen 10 is used to fill in each of the spaces, the position and movement of the electronic pen 10 on the paper 12 can be determined by repeatedly detecting the current x, y coordinates of the pen 10 (e.g., at rate of 100 frames per second). The markings can then be converted into ASCII text using an appropriate handwriting recognition program. Once the user completes the form, the e-mail can be sent, for example, by checking a send box at a predetermined location on the paper 12.

Preferably, the coordinate information collected by the pen 10 is sent by a short range radio transmitter in the electronic pen 10 to a nearby mobile station 14 using a short range radio interface 16 such as a local wireless radio link (e.g., a local wireless radio link supported by Ericsson's Bluetooth™ wireless communications technology).

Alternatively, instead of using a mobile station 14, the coordinate information could also be sent to a desktop or portable computer, a personal digital assistant (PDA), a television, or a Bluetooth terminal. Moreover, instead of using a local wireless radio link, other types of local wireless links, such as inductive coupling and infrared light; other types of radio links; or wired transmission media, such as a cable can also be used. The information can then be forwarded via an appropriate link, such as a cellular air interface 18, to a base station 20 or other network node.

Referring now to FIGURE 2, there is illustrated a schematic diagram of a system 2 for supporting use of the electronic pen 10 described in connection with FIGURE 1. Throughout the subsequent discussion, the system 2 is described primarily in connection with an electronic pen 10. It will be understood, however, that the invention and the underlying system 2 can instead use any type of electronic reading device, such as an electronic pen, an electronic mouse, or a hand scanner. As shown in FIGURE 2, the system 2 includes six different entities, including the electronic pen 10, electronic pen client 22, a control node 24, a name server 26, a base translator 28, and an

application server 30. Although these various devices are described and depicted separately, it is also possible to combine two or more of the entities into the same device (e.g., the electronic pen 10 and electronic pen client 22
5 can be contained in the same device).

The electronic pen 10 is responsible for detecting positions on the address pattern, producing actions, and sending information to the electronic pen client 22. In addition to being able to leave pen markings, some
10 electronic pens can also have the ability to produce other types of output, such as sound, vibration, or flashing lights. The electronic pen 10 includes a memory for storing a current grid, which comprises information relating to an area of the address pattern that is near
15 the most recently detected position of the electronic pen 10. When the electronic pen 10 is loaded with the current grid, it knows what actions to take based on the positions that are read from the address pattern. When the electronic pen 10 is first turned on or when it moves to
20 an area outside of the current grid, the electronic pen 10 must first request a new grid description before it can continue processing information. In such a situation, the

electronic pen 10 requests a new grid description from the electronic pen client 22.

5 The electronic pen client 22 can be located in a mobile station 14, in a PDA, in a desktop or portable computer, in the electronic pen 10 itself, in a server somewhere on the Internet, or in another device. The electronic pen client 22 serves as the center of communications in the overall system 2. In particular, the electronic pen client 22 receives new grid requests and action requests from the electronic pen 10 and responds to these requests by contacting an appropriate entity within the overall system 2 to properly respond to the request from the electronic pen 10. Furthermore, when the electronic pen 10 is being used in connection with a particular application, the electronic pen client 22 can store the application and/or any corresponding data received from the electronic pen 10 to facilitate processing and use of the application.

20 The name server 26 is used for translating a detected position on the address pattern into a Uniform Resource Location (URL) associated with that position. Different portions of the address pattern are assigned to different applications. Neither the electronic pen 10 nor the

electronic pen client 22, however, is aware of all of the different applications and the particular areas assigned to each application. Thus, when the electronic pen 10 detects a new or unknown position, it forwards the
5 position information to the electronic pen client 22, which in turn sends the information to the name server 26. The name server 26 then identifies an application associated with the received position and retrieves a URL where a description of the particular application can be
10 found. The retrieved URL can then be used by the electronic pen client 22 to retrieve the application description.

As an alternative, the name server 26 can comprise a global name server that keeps track of a location, in the
15 form of URLs to local name servers, where more information can be found about different addresses in the pattern. Similarly, each local name server can use other local name servers to obtain the necessary information, i.e., to convert a position into a URL where an application
20 description can be found. At the lowest level, the local electronic pen client should know all the paper addresses that are within a specific application or applications.

There are some services that should be available in the overall system 2 for which it is inconvenient or not feasible to support such services in the electronic pen 10 or the electronic pen client 22. In such a case, the base translator 28 can be used to support the services. For example, the base translator 28 might contain handwriting recognition software for converting pen actions into text or for converting pen actions into a predefined set of symbols. When such services are needed, the electronic pen client 22 can send a request to the base translator 28 along with the necessary data, and the base translator 28 can perform the requested service.

Another entity in the system 2 is a control node 24. The control node 24 is used for responding to actions in a standardized way. For example, the control node 24 can be used to respond to certain generic functions, such as "cancel" or "submit" functions, in a consistent manner without regard to the particular application that is currently active.

In addition, the control node 24 is used for creating streaming-like applications. For instance, some applications might require that the positions on the address pattern that are detected by the electronic pen 10

be immediately sent, upon detection, to the electronic pen client 22 for use by the application (i.e., the electronic pen 10 does not wait to transmit the position data until a complete stroke is detected or until a "send" field is touched). One example is an application that is used to control an industrial robot in a warehouse. In such a case, the application description that is loaded onto the electronic pen server 22 can include instructions that all positions be streamed to a control node 24. As a result, the control node 24 can receive the positions in real time and can control the robot without waiting for the form (i.e., the current grid) to be completed. Thus, the control node 24 can perform a real-time translation from detected positions to a responsive action, such as moving an object (e.g., a robot, a valve, etc.) or controlling a process.

The application server 30 is a regular web or wireless application protocol (WAP) server that supports an application associated with a particular area of the address pattern. The application server 30 stores an application description and provides the application description to the electronic pen client 22 upon request. In addition, the application server 30 receives input data

from the electronic pen 10 via the electronic pen client
22. For example, the application description might define
a number of data entry areas on a form. Thus when data is
entered on the form by the electronic pen 10, the data is
5 received by the electronic pen client 22, converted into
text using handwriting recognition software, and forwarded
to the application server 30, which stores the data or
otherwise processes the data in accordance with the
function of the application.

10 Referring now to FIGURES 3 through 6 there are
illustrated various examples of protocol stacks that can
be used for communicating between the entities shown in
FIGURE 2. Generally, however, such protocols apply
however, only if the two communicating entities are
15 implemented in different devices. If two or more entities
are combined into one device, a proprietary protocol can
be used to communicate between the entities. FIGURE 3
illustrates the protocol stacks that can be used in the
case of local communications (e.g., using Bluetooth™)
20 between the electronic pen 10 and the electronic pen
client 22. If, on the other hand, the electronic pen 10
and the electronic pen client 22 communicate with one
another via an Internet connection, the protocol stacks

depicted in FIGURE 4 will be used. FIGURE 5 illustrates a protocol stack for communicating between the electronic pen client and each of the supporting entities, such as the name server 26, the control node 24, the base

5 translator 28, and the application server 30, when the electronic pen client 22 is not contained within a server on the Internet (e.g., such as when the electronic pen client 22 is located in a mobile phone 14). Finally, FIGURE 6 depicts the protocol stacks that are used when
10 the electronic pen client 22 is located on the Internet.

There are a number of procedures that can be used by the various entities in the system 2 to allow the system to operate properly. When the electronic pen 10 detects a position on the address pattern that is not within its
15 currently loaded grid or when the electronic pen 10 has no currently loaded grid, the electronic pen 10 initiates a new grid procedure. The new grid procedure involves sending a new grid request object to the electronic pen client 22. The new grid request object contains the newly
20 detected position, a description of the actions that the electronic pen 10 can natively support, and a description of the output signals that the electronic pen 10 supports. The reply to a new grid request object is a grid

description, which can be provided by the electronic pen client 22 from its own internal memory or from the information provided by an application server 30.

Generally, the electronic pen client 22 extracts the grid description from an application description received from the application server 30. The grid description should only contain action-field-types that the electronic pen 10 has indicated that it natively supports, which means that the electronic pen client 22 in some cases should convert the extracted grid description into a format that the electronic pen 10 can understand.

In some situations, it may be necessary for the electronic pen 10 to unload its current grid at the request of the electronic pen client 22. In such a case, the electronic pen client 22 sends an empty grid description to the electronic pen 10, thereby causing the electronic pen 10 to unload its current grid. This can occur, for example, when a particular application is complete or when a new grid description request received from the electronic pen 10 cannot be fulfilled, such as when the position received from the electronic pen 10 is not registered in the name server 26.

Another similar message is the empty grid description with a grid exception. When the electronic pen 10 requests a new grid description from the electronic pen client 22, the electronic pen client 22 uses the detected position specified in the request to ask the name server 26 for a URL where the application description can be found. If no URL is returned, the electronic pen client 22 can send an empty grid description with a grid exception to the electronic pen 10. The grid exception comprises a rectangle or other shape indicating the area around the detected position where no registered applications can be found. Preferably, the indicated area is as large as possible so that the electronic pen 10 and/or electronic pen client 22 know the extent of the surrounding area that is unassigned and do not have to repeatedly send requests to the name server 26. Thus, the empty grid description with a grid exception causes the electronic pen 10 to unload its current grid and also informs the electronic pen 10 of an area surrounding the detected position that can essentially be ignored because its is not associated with any application.

The procedure that is used when the electronic pen 10 detects a new position is a find application description

location procedure. This procedure is used by the electronic pen client 22 to translate a detected position received from the electronic pen 10 into a URL where a description of an application corresponding to that position can be found. The procedure involves sending a request from the electronic pen client 22 to the name server 26 containing identification of the detected position. The name server 26 responds by sending a reply to the electronic pen client 22 containing a URL where an application description can be found or, if the detected position is not registered in the name server 26, containing an indication that no associated application is known to exist.

Once the electronic pen client 22 knows the URL where an application description can be found, the electronic pen client 22 can initiate a get application description procedure, which allows the electronic pen client 22 to retrieve the application description from the application server 30. In particular, the electronic pen client 22 sends an application description request containing a unique ID for the requesting electronic pen 10 and/or electronic pen client 22 to the application server 30 located at the URL address provided by the name server 26.

In response, the application server 30 provides an application description object to the electronic pen client 22, which loads the application onto the electronic pen client 22. The application description object is
5 similar to an HTML form with some additions and modifications.

Furthermore, the application description object can be sent from the application server 30 to the electronic pen client 22 in response to a submitted form (i.e., a
10 submission of one completed form might automatically result in a new form being loaded onto the electronic pen client 22). A related procedure is the application submit procedure, which is used by the electronic pen client 22 when the user of the electronic pen 10 selects a "submit"
15 field in a form. In response to the selection of the "submit" field, the electronic pen client 22 will submit the form content in accordance with instructions received in the application description. Typically, the electronic pen client 22 will submit the form content, in the same
20 way as a regular web browser, to a URL specified in a form tag of the application description.

When an action that can be handled by the electronic pen 10 itself is generated, an action procedure is

initiated by the electronic pen 10 to send an action request object to the electronic pen client 22. If the electronic pen client 22 cannot translate the action into a field value itself, the electronic pen client 22 further
5 forwards the request to a base translator 28 for translating the action into a field value. In response to the action request object, an action reply object is sent from the electronic pen client 22 to the electronic pen 10. The action reply object contains output information
10 that indicates to the electronic pen 10 which outputs signals to use. The output information, however, cannot be of type that the electronic pen 10 has previously indicated that it does not support. In some instances, the action reply object might contain a new grid description.
15 In such a case the electronic pen 10 will unload its current grid description and load the new grid description. Similarly, if the action reply object contains an empty grid description, the electronic pen 10 will simply unload its current grid description.

20 The action request object is also sometimes used to specify actions that should be processed by the control node 24. In this instance, the electronic pen client 22 initiates a control procedure by forwarding the received

action to the appropriate control node 24. As a result,
the control node 24 sends an action reply object to the
electronic pen client 22.

The operation of the electronic pen 10 will now be
5 discussed in greater detail. Each electronic pen 10 has a
unique pen ID, which is sent to the application server 30
when an application description is requested. The
electronic pen ID allows the application to identify the
particular user that is using the application and to
10 distinguish between multiple concurrent users of the same
application, such as when different electronic pens 10 are
being used in connection with separate sheets of paper
that each contain the same portion of the address pattern.

Referring now to FIGURE 7, there is illustrated a
15 block diagram of the electronic pen processor logic that
handles positions, strokes, actions, and grid descriptions
for the electronic pen 10. The electronic pen 10 includes
a control block 32 for controlling the operation of the
electronic pen 10. A grid description block 34 represents
20 a memory location that stores a current grid description.
At any given time, the electronic pen 10 can be in either
of two modes. In a first mode, a grid description is

loaded, while in a second mode, the grid description block 34 is not loaded with a current grid description.

As the electronic pen 10 moves across an address pattern, the electronic pen 10 periodically (e.g., every 1/100 of a second) detects a position by detecting all of the dots within, for example, a 3mm by 3mm area. Each detected position is forwarded (as indicated at 36) to a position first in first out (FIFO) block 38, which acts as a buffer for temporarily storing the detected positions.

10 The clocking of the position FIFO block 38 is controlled by the control block 32 (as indicated at 40).

The detected position is fed from the position FIFO block 38 (as indicated at 42) to an in grid detector 44. The in grid detector 44 retrieves data from the grid description block 34 (as indicated at 46) and determines whether the received position is within the loaded grid description. If not, the in grid detector 44 notifies the control block 32, which in turn initiates a request for a new grid. When the detected position is within the current grid, the position is then sent (as indicated at 50) from the in grid detector 44 to a stroke engine 52. The stroke engine 52 converts the received positions into strokes, which are then sent (as indicated at 54) to an

action engine 56. A complete stroke is created when the electronic pen 10 is lifted from the paper or when it moves outside of the grid field where the stroke began. Finally, the action engine 56 converts the received stroke
5 into an action that can be sent to the electronic pen client 22. By using grid action-field-types, the action engine knows which type of action to produce for a specific grid field.

Referring now to FIGURE 8, there is illustrated a
10 block diagram of a state machine for the control block 32 shown in FIGURE 7. In this figure, events are indicated in capital letters, while tasks associated with the event are depicted in brackets. The process starts at step 60 with a start up event 62, which causes the position FIFO
15 block 38 to begin receiving detected positions. Initially, the electronic pen 10 is in a no grid loaded state 64, which means that the electronic pen 10 does not have a grid loaded in the grid description block 34. As a result, the control block 32 generates an outside grid
20 indication 66, thereby causing the electronic pen 10 to send the request for a new grid description to the electronic pen client 22 (i.e., in accordance with the new grid procedure) and to stop the FIFO buffer 38. At this

point, the electronic pen 10 enters a waiting for grid state 68.

Once the new grid has been received (as indicated at 70), the control block 32 moves to a grid loaded state 72, at which time the new grid is loaded into the grid description block 34 and the position FIFO block 38 resumes operation. On the other hand, if no grid is received (as indicated at 74), at least a portion of the positions stored in the FIFO buffer 38 are erased. Which part of the FIFO buffer to erase is determined by the grid exception area, if any, in the received empty grid description. Accordingly, all positions stored in the FIFO buffer 38 that are within the grid exception area should be erased. If no grid exception is received, the stroke associated with the position is erased. In addition, the FIFO block 38 resumes operation and the control block 32 moves into the no grid loaded state 64.

When the control block 32 is in the grid loaded state 72, a current grid is loaded in the grid description block 34. While the control block 32 remains in this state 72, the position FIFO block 38 continues to receive detected positions and passes them on to the stroke engine 52 and action engine 56. Actions produced by the action engine

56 are sent (as indicated at 58) to the electronic pen client 22 (i.e., in accordance with the action procedure described above).

At some point, an outside grid indication 74 may be received by the control block 32 from the in grid detector 44. The outside grid event 74 causes the FIFO block 38 to stop generating new positions. In addition, the electronic pen 10 enters a flushing stroke and action state 76 wherein the strokes that are currently in the stroke engine 52 and the actions that are currently in the action engine 56 are flushed to the electronic pen client 22. Once the stroke engine 52 and action engine 56 have been fully flushed (as indicated at 78), the electronic pen 10 sends a request for a new grid to the electronic pen client 22 and unloads the current grid. The control block 32 then moves back into the waiting for grid state 68.

As a general matter, the electronic pen 10 may be capable of supporting various different types of output, including audio, such as warning tones; visual, such as a flashing light; tactile, such as vibration; and/or ink. In some cases, it might be desirable to allow the user of the electronic pen 10 to turn off the ink of the pen 10, such

as when the electronic pen is being used on a portion of the address pattern that is public or shared or when the user wants to be able to reuse the current sheet of paper.

The electronic pen client 22 will now be described in greater detail. Generally, the electronic pen client 22 is analogous to a regular web browser. It is responsible for loading applications from application servers 30 and for handling input from the electronic pen 10.

Preferably, the electronic pen client 22 is located in a separate device from the electronic pen 10 itself. This is because it is desirable to minimize the size and power supply requirements of the electronic pen 10, which will likely be adversely affected by the processing resources and memory necessary to support the functions of the electronic pen client 22.

Referring now to FIGURE 9, there is illustrated a block diagram of a state machine for the electronic pen client 22. Initially, the electronic pen client 22 is in a no application loaded state 80. The electronic pen client 22 recognizes only one signal when in this state 80, namely a new grid request from the electronic pen 10. Such a request causes a load grid indication event 82. The electronic pen client 22 responds by sending a request

to the name server 26 to translate a position contained within the new grid request into a URL where the application description can be found (i.e., in accordance with the find application location procedure). Next, the electronic pen client 22 enters a waiting for application description URL state 84. If no URL for the application description can be found (as indicated at 86), the electronic pen client 22 sends a new grid reply to the electronic pen 10, wherein the reply contains an empty grid description with a grid exception. As a result, the electronic pen client 22 returns to the no application loaded state 80.

If a URL for the application description is received from the name server 26 (as indicated at 88), the electronic pen client 22 sends a request to the application server 30 to retrieve the application description (i.e., in accordance with the get application description procedure). Accordingly, the electronic pen client 22 enters a waiting for application description state 90.

If the electronic pen client 22 does not receive an application description from the application server 30 (as indicated at 92), a new grid reply is sent by the

electronic pen client 22 to the electronic pen 10 wherein
the reply contains an empty grid. Thus, the electronic
pen client 22 returns to the no application loaded state
80. If, however, the electronic pen client 22 does
5 receive an application description from the application
server 30 (as indicated at 94), the electronic pen client
22 sends a new grid reply to the electronic pen 10
containing a new grid description, and the electronic pen
client 22 loads the application in its memory. In
10 addition, the electronic pen client 22 moves into an
application loaded state 96.

In the application loaded state 96, five types of
actions can be received by the electronic pen client 22
from the electronic pen 10. First, a received action can
15 include a request that the electronic pen client 22 cannot
handle itself, in which case the electronic pen client 22
will send the action to the base translator 28 (as
indicated at 98). The electronic pen client 22 then moves
into a waiting for response from the base translator state
20 100. Once a base translator response 102 is received by
the electronic pen client 22, the electronic pen client 22
updates a current form or other data associated with the

currently loaded application and sends an action reply to the electronic pen 10 with appropriate output information.

Another type of action that the electronic pen client 22 can receive from the electronic pen 10 is a request
5 that should be forwarded to a control node 24. In such a case, the action is sent to a control URL specified in the application description (as indicated at 104), and the electronic pen client 22 enters a waiting for response from the control state 106. Once a response is received
10 from the control (as indicated at 108), the electronic pen client 22 sends an action reply to the electronic pen 10 with appropriate output information.

A third type of action is a submit form request, in response to which the electronic pen client 22 will submit
15 the current form to the application server 30 that is identified by the URL in the application description (as indicated at 110). The electronic pen client 22 then enters a waiting for response from the application server state 112. If the application server 30 responds by
20 sending an empty application description to the electronic pen client 22 (as indicated at 114), the current application is unloaded from the electronic pen client 22 and an action reply is sent to the electronic pen 10 with

an empty grid. As a result, the electronic pen client 22 returns to the no application loaded state 80. On the other hand, if the application server 30 responds with a non-empty application description, the old application is unloaded from the electronic pen client 22, the new application description is parsed and loaded in the electronic pen client 22, an action reply is sent to the electronic pen 10 with a new grid description and with appropriate output information, and finally the electronic pen client 22 returns to the application loaded state 96.

A fourth type of action that can be received by the electronic pen client 22 from the electronic pen 10 is a request to load a new grid. This action occurs, for example, when a position outside of the current grid is detected by the electronic pen 10. When a new grid request is received, the electronic pen client 22 sends a request to the name server 26 (as indicated at 116) and the electronic pen client 22 returns to the waiting for application description URL state 84.

Finally, a fifth type of action that can be received by the electronic pen client 22 is an action that the electronic pen client 22 can handle itself, in which case the electronic pen client 22 updates the current form and

5 sends an action reply to the electronic pen 10 with
appropriate output information (as indicated at 118). The
electronic pen client 22 then remains in the application
loaded state 96. One type of action that the electronic
10 pen client 22 might be able to handle itself is a local
application. For example, the electronic pen client 22
might be capable of performing certain basic functions
that are defined by a local application. Thus, when the
electronic pen client 22 receives a new grid request, the
15 position associated with the new grid request can be
analyzed to determine if it corresponds to a local
application. If so, the electronic pen client 22 can load
the application description from its local memory, send a
new grid description to the electronic pen 10 without
20 having to communicate with the name server 26 or the
application server 30.

Another action that might be handled locally by the
electronic pen client 22 relates to the selection of
fields within a form. When the electronic pen client 22
20 receives an action, the field that corresponds to that
action receives focus. When this occurs, the electronic
pen client 22 might display the field's value on its
display or output the value by audio. In addition, the

electronic pen client 22 might allow the user to edit the value of the field by means other than the electronic pen 10. Yet another type of action that might be handled by the electronic pen client 22 itself are actions that
5 relate to a clipboard function. When a "copy" field is selected, the value of the field that had focus at the time the copy field was selected is transferred to the clipboard. Similarly, when a "paste" field is selected, the value stored in the clipboard is transferred to the
10 field that had focus at the time the paste field was selected.

Referring now to FIGURES 10A through 10C, there is shown, by way of example, a message flow and signaling diagram illustrating the operation of the electronic pen system 2 depicted in and discussed in connection with
15 FIGURE 2. Initially, the electronic pen 10 detects a first position on the address pattern at step 120 (e.g., at a location on a sheet of paper designated for composing and sending e-mails). At this stage, it is assumed that
20 the electronic pen 10 is in a no grid loaded state. Thus, in response to the detection of the first position, the electronic pen 10 sends a new grid request 122, which contains the detected position information, to the

electronic pen client 22. As a result, the electronic pen client 22 sends an application location request 124 containing the detected position information to the name server 26, at step 126. The name server 26 translates the detected position into a URL where an application description that corresponds to the detected position can be found (e.g., a URL address for a server containing an e-mail application), and returns an application location reply 128 containing the retrieved URL to the electronic pen client 22.

The electronic pen client 22 then sends an application description request 130, which contains the unique pen ID for the electronic pen 10, to the application server 30. The application server 30 retrieves the application description at step 132 and sends an application description reply 134 containing the retrieved application description to the electronic pen client 22. The electronic pen client 22 then parses and stores the application description at step 136. This step further involves generating a current grid description from the application description and sending the grid description to the electronic pen 10 in a new grid reply 138. The electronic pen 10 stores the received grid

description at step 140 and resumes processing of the detected positions. Using the detected positions and the information in the grid description (e.g., so that the electronic pen 10 knows which fields of the e-mail form are being filled in), the electronic pen 10 generates strokes at step 142 and generates actions at step 144 using the stroke engine 52 and action engine 56 shown in FIGURE 7.

Each time an action is generated that cannot be handled by the electronic pen 10 itself, an action request 146 containing a description of the action is sent from the electronic pen 10 to the electronic pen client 22. At this point, the electronic pen client 22 should determine what type of action has been received so that it can respond to the action in an appropriate manner. First, it is determined whether the action requires the attention of, or otherwise should be processed in accordance with, a local application at step 148. Very basic applications or frequently used applications (e.g., delete entered text), for example, might be stored locally to avoid having to contact another entity. In such a case, the electronic pen client 22 retrieves the local application at step 150

and sends an action reply 152, which can contain a new grid description or other appropriate information.

However, if it is determined at step 148 that the received action does not relate to a local application,
5 the process continues at step 154 where it is determined whether the received action requires processing by an external translator (e.g., handwriting recognition). If so, an action request 156 containing a description of the action is sent by the electronic pen client 22 to the base
10 translator 28. The base translator 28 processes the action at step 158 and sends an action reply 160 containing output information responsive to the received action (e.g., text corresponding to written characters) to the electronic pen client 22, which can forward the output
15 information to the electronic pen 10 in an action reply 162, if necessary.

If it is determined at step 154 that the received action does not require processing by an external translator, it is next determined whether the action
20 relates to a control application at step 164. If so, an action request 166 containing a description of the action is sent by the electronic pen client 22 to the control server 24. The control server 24 processes the received

action at step 168, if a response is necessary, and
returns output information responsive to the received
action in an action reply 170, which is forwarded from the
electronic pen client 22 to the electronic pen 10 in an
5 action reply 172.

Assuming that it is determined at step 164 that the
received action does not relate to a control function, it
is next determined whether the action comprises a request
to submit a form at step 174 (e.g., a selection of a
10 "send" area on the e-mail form). If so, an action request
176 containing the data entered onto the form is sent by
the electronic pen client 22 to the application server 30.
The application server 30 processes the form at step 178
and sends an action reply 180 containing a new application
15 description (or an empty application description) to the
electronic pen client 22. The electronic pen client 22
parses and stores the new application description at step
182 and generates a new grid description from the newly
received application description. The electronic pen
20 client 22 then sends an action reply 184 containing the
new grid description. Although not illustrated in the
figure, the electronic pen 10 will typically respond to
the receipt of a new grid description by unloading its

current grid description and loading the new grid
description into its memory.

At some point, it is assumed that the electronic pen
10 detects a position that is outside of the currently
5 loaded grid at step 186. In response to such an event,
the electronic pen 10 sends a new grid request 188
containing the newly detected position data to the
electronic pen client 22. In response, the electronic pen
client 22 again generates an application location request
10 190 containing the detected position data and sends the
request to the name server 26. The name server 26
determines whether a URL for an application description
that corresponds to the newly detected position is
available at step 192.

15 If so, the name server 26 sends an application
location reply 194 containing a retrieved URL to the
electronic pen client 22, which in turn sends an
application description request 196 containing the unique
pen ID for the electronic pen 10 to the application server
20 30 at the identified URL address, just as previously
discussed in connection with messages 128 and 130. In
this case, however, it is assumed that the application
server 30 determines that the requested application

description is unavailable at step 198. As a result, the application server 30 sends an application description reply to the electronic pen client 22 containing an empty application description. In response to the receipt of an empty application description, the electronic pen client 22 unloads the current application at step 202 and sends a new grid reply 204 containing an empty grid description to the electronic pen 10. The electronic pen 10 responds to the receipt of the empty grid description by unloading the current grid description at step 206.

Another possibility is that the name server 26 determines at step 192 that a URL corresponding to the detected position is not available. In this situation, the name server 26 sends an application location reply 208 to the electronic pen client 22. The reply 208 may simply be empty to indicate that a URL is not available. Preferably, however, the reply 208 contains a grid exception defining the largest area possible around the detected position for which there is no corresponding URL. In response to the reply 208, the electronic pen client 22 sends a new grid reply 210 containing an empty grid description with a grid exception. Upon receiving the reply 210, the electronic pen 10 unloads the current grid

description at step 212. Furthermore, assuming that the electronic pen 10 receives and recognizes the grid exception information, the electronic pen 10 may subsequently be able to determine that certain detected
5 positions on the address pattern are not associated with any application without having to send a request to the name server 26 or the application server 30.

To implement the electronic pen 10, there should be some type of mechanism for allowing the electronic pen 10
10 to determine when to attempt to detect an address pattern, when to store detected positional information, and/or when to forward or transmit the detected positions to the electronic pen client 22. In addition, it is also desirable to allow a user of the electronic pen 10 to
15 select between inking mode, wherein the electronic pen 10 writes ink or other markings on the paper or other surface with which the tip of the pen 10 comes into contact, and a non-inking mode, wherein the electronic pen 10 does not leave ink marks when the tip of the electronic pen 10
20 comes into contact with paper or other surfaces.

In accordance with the present invention, it is possible to turn the inking function of the electronic pen 10 on and off. In particular, a user of the electronic

pen 10 can use the pen 10 with an ink cartridge extended in a writing position or with the ink cartridge retracted so that the electronic pen 10 does not leave ink markings. The ability to use the pen 10 with its inking function

5 turned on allows users to keep a paper copy of any drawings, handwritten text, or other markings made with their electronic pen 10, while the ability to use the pen 10 in the non-inking mode facilitates use of the pen in connection with reusable or public data entry sheets or
10 other public or reusable surfaces.

In another aspect of the invention, the electronic pen 10 can be used to navigate on a mobile phone 14 or other electronic device, such as a PDA, laptop computer, or personal computer, or to manipulate, enter, or delete
15 data by writing on a specially formatted paper. In particular, the electronic pen 10 can relay the written information to the mobile phone 14 or other electronic device. This use of the electronic pen 10 and specially formatted paper permits most messaging and
20 telecommunications control functions to be performed in a user friendly manner without the use of other devices. Moreover, actions resulting from the use of the electronic

pen 10 and specially formatted paper can be represented on a display of the mobile phone 14, PDA, or computer.

For example, there is illustrated in FIGURE 11, a reusable calendar entry sheet 220. It is assumed that the calendar entry sheet 220 is printed on a paper that includes a portion of the address pattern (not shown). Preferably, the address pattern is either not visible to the human eye or is only faintly visible so that the address pattern does not present a significant distraction to users. The sensor in the electronic pen 10, however, can detect the address pattern, and therefore, the precise position of the pen 10 at any given time can be determined, even when the pen is in a non-inking mode. Accordingly, when the electronic pen 10 is used to fill in a date field 222, the motion of the electronic pen 10 over the address pattern can be detected. Then, based on an analysis of the strokes, the handwritten date can be stored and/or converted into text. Similarly, appointment information or other data can be written in the appropriate fields of the calendar 224. By storing the detected positions, generating strokes based on the detected positions, and generating actions based on the strokes, the information written on the calendar can

automatically be stored in a calendar application database (located, e.g., in a mobile phone 14 or in a remote server) associated with the user of the electronic pen 10. If desired, information can also be manipulated or deleted in a similar manner. Because the electronic pen 10 is preferably used in a non-inking mode, the calendar entry sheet 220 can be reused. Furthermore, the same types of functions can be used to enter, delete, and manipulate data in a electronic phone book, task list, or scheduler.

Referring now to FIGURE 12, there is illustrated an example of a reusable phone settings entry sheet 226. As with the previous example, it is assumed that the reusable phone settings entry sheet 226 is intended to be used when the electronic pen 10 is in a non-inking mode. Thus, by simply touching the electronic pen 10 to a desired setting in a ring volume field 228, the ring volume of a phone associated with, or otherwise selected by, the electronic pen 10, can be set. In addition, the electronic pen 10 can be used to select various other setting fields, such as a ring melody field 230, a greeting field 232, a phonebook entry field 234 for entering names and numbers into the phone internal memory, and fields relating to any other desired settings. When the electronic pen 10 is

used to select or to enter information into these fields, such selections or entered information can be transmitted by the electronic pen 10 to the electronic pen client 22 contained within, for instance, a mobile phone 14.

5 Although the invention is described primarily in connection with a reusable calendar sheet 220 and a reusable phone setting entries sheet 226 in a non-inking mode, the invention is not limited to these applications. Instead, the electronic pen 10 can also be used for such
10 data entry and storage when it is in an inking mode and can be used in connection with specially formatted paper to input any type of printed text or pattern in either the inking or non-inking mode. For example, the electronic pen 10 and an appropriately formatted paper or papers
15 could also be used for navigating on a phone menu, dialing a number by writing it in a predefined "dialing" field, writing a message that is converted to a short message service (SMS) message or email message in the phone or in the electronic pen client 22, or saving notes in the phone
20 14 or in the electronic pen client 22 in the form of graphical or ASCII text, characters, and/or pictures. Similarly, the preprinted paper can comprise a calendar, phone book, or other type of personal information manager

application, or the preprinted paper can be formatted to facilitate entry of settings in a phone, personal computer, or other electronic device capable of communicating with electronic pen 10.

5 In accordance with another aspect of the present invention, the electronic pen 10 includes a paper touch sensor, or force sensitive detector, for determining when the electronic pen 10 is in contact with the paper. Preferably, the paper touch sensor is used to enable and
10 disable the position sensing mechanism in the electronic pen 10 depending upon whether the electronic pen 10 is in contact with either a paper or other surface, regardless of whether the electronic pen 10 is in an inking or non-inking mode. For example, the paper touch sensor can be
15 used to enable the position FIFO Block 38 shown in FIGURE 7 when it senses that the electronic pen 10 is in contact with a paper or other surface and can be used to disable the position FIFO Block 38 when the paper touch sensor detects that the electronic pen 10 is not in contact with
20 any surface. Accordingly, the electronic pen 10 will detect positions and generate strokes and actions only when the paper touch sensor detects that the electronic pen 10 is in contact with a paper or other surface.

Referring now to FIGURES 13A and 13B, there is illustrated an electronic pen 10 having a paper touch sensor 236 for detecting whether the electronic pen 10 is in contact with a paper 240 or other surface regardless of whether an ink cartridge 238 is in an extended, or ink-on, position (FIGURE 13A) or in a retracted, or ink-off, position (FIGURE 13B). Alternatively, instead of using an ink cartridge 238, the electronic pen 10 can utilize a pencil lead, a felt-tip marker, or any other type of marking tip for writing on paper or other surfaces.

And yet another aspect of the present invention, the electronic pen 10 can be used to perform a mouse function. Accordingly, the electronic pen 10 can be used for navigation purposes (e.g., in a navigation field) when the paper touch sensor 236 detects that the electronic pen 10 is in contact with a paper 240 or other surface. In addition, a selection at a particular location can be indicated by "clicking" the tip of the electronic pen 10 against the paper 240 or other surface either by tapping the tip of the electronic pen 10 against the paper 240 or other surface or by pressing the tip of the electronic pen tip against the paper 240 or other surface with additional force (i.e., a force greater than a predetermined

threshold force). When using the electronic pen 10 to perform a mouse-like function, the ability to retract the ink cartridge 238 provides an additional benefit in that the electronic pen 10 is not writing and the ink cartridge 5 238 is not damaged when the user "clicks" the electronic pen 10.

Although various preferred embodiments of the method and apparatus of the present invention have been illustrated in the accompanying Drawings and described in 10 the foregoing Detailed Description, it is understood that the invention is not limited to the embodiments disclosed, but is capable of numerous rearrangements, modifications, and substitutions without departing from the spirit of the invention as set forth and defined by the following 15 claims. Furthermore, it shall be understood that the terms "comprises" and "comprising," when used in the foregoing Detailed Description and the following claims, specifies the presence of stated features, elements, steps, or components but does not preclude the presence or 20 addition of one or more other features, elements, steps, components, or groups thereof.

WHAT IS CLAIMED IS:

- 1 1. An electronic reading device, comprising:
2 an optical detector for detecting positional
3 data for the electronic reading device with respect to an
4 address pattern of a specially formatted surface; and
5 a sensor for sensing whether the electronic
6 reading device is in contact with the specially formatted
7 surface, wherein the detection of positional data by the
8 optical detector is enabled at least when the sensor
9 determines that the electronic reading device is in
10 contact with the specially formatted surface.
- 1 2. The electronic reading device of claim 1,
2 wherein the detection of positional data by the optical
3 detector is disabled when the sensor determines that the
4 electronic reading device is not in contact with the
5 specially formatted surface.

1 3. The electronic reading device of claim 1,
2 further comprising a buffer for storing the detected
3 positional data, wherein the storing of the detected
4 positional data is disabled when the sensor determines
5 that the electronic reading device is not in contact with
6 the specially formatted surface.

1 4. The electronic reading device of claim 1,
2 further comprising a local wireless link transmitter for
3 transmitting the detected positional data to a separate
4 electronic device, wherein the transmission of the
5 detected positional data is disabled when the sensor
6 determines that the electronic reading device is not in
7 contact with the specially formatted paper.

1 5. The electronic reading device of claim 1,
2 further comprising a writing means that can be selectively
3 activated and deactivated, wherein the sensor operates to
4 detect contact of the electronic reading device with the
5 specially formatted surface both when the writing means is
6 activated and when the writing means is deactivated.

1 6. The electronic reading device of claim 1,
2 wherein the sensor comprises a force sensitive detector
3 for determining whether the electronic reading device is
4 in contact with the specially formatted surface.

1 7. The electronic reading device of claim 6,
2 wherein the sensor detects a user selection of a location
3 on the address pattern in response to a detection of
4 contact between the electronic reading device and the
5 specially formatted surface greater than a predetermined
6 threshold force.

1 8. A system for electronic entry of information,
2 comprising:

3 a specially formatted surface including an
4 address pattern, wherein a particular position on the
5 address pattern can be determined based on an examination
6 of only a portion of the address pattern; and

7 an electronic reading device including:

8 an optical detector for detecting a portion
9 of the address pattern adjacent to the electronic
10 reading device;

11 a sensor for detecting contact between a
12 tip of the electronic reading device and the
13 specially formatted surface; and

14 a processor for receiving the positional
15 data and determining a particular position of the
16 electronic reading device relative to the address
17 pattern when the sensor detects contact between a tip
18 of the electronic reading device and the specially
19 formatted surface.

1 9. The system of claim 8, wherein the specially
2 formatted surface comprises a paper preprinted with at
3 least one data entry field.

1 10. The system of claim 9, wherein the processor
2 identifies the preprinted paper based on the determined
3 particular position.

1 11. The system of claim 9, wherein the processor
2 converts a plurality of determined positions within the at
3 least one data entry field into a data entry for the at
4 least one data entry field.

1 12. The system of claim 9, wherein the electronic
2 reading device further includes a writing means that can
3 be selectively activated and deactivated, and wherein the
4 preprinted paper comprises a reusable preprinted paper for
5 use when the writing means is in a deactivated mode.

1 13. The system of claim 9, wherein the preprinted
2 paper comprises a form for entering information relating
3 to a personal information manager application.

1 14. The system of claim 9, wherein the preprinted
2 paper comprises a form for entering settings for an
3 electronic device.

1 15. A method for using an electronic reading device,
2 comprising the steps of:

3 sensing whether the electronic reading device is
4 contacting a specially formatted surface using a touch
5 sensor;

6 detecting positional data for the electronic
7 reading device relative to an address pattern of the
8 specially formatted surface; and

9 storing the positional data when the touch
10 sensor detects that the electronic reading device is
11 contacting the specially formatted surface.

1 16. The method of claim 15, further comprising the
2 step of selecting between an activated writing mode and a
3 deactivated writing mode for the electronic reading
4 device.

1 17. The method of claim 16, wherein the step of
2 selecting comprises selecting the deactivated writing
3 mode.

1 18. The method of claim 17, wherein the specially
2 formatted surface comprises a reusable data entry paper
3 for a selected application, further comprising the step of
4 using the electronic reading device in the deactivated
5 writing mode in connection with the reusable data entry
6 paper to enter data relating to the selected application.

1 19. The method of claim 18, wherein the selected
2 application comprises a personal information manager.

1 20. The method of claim 18, wherein the selected
2 application facilitates an entry of settings on an
3 electronic device.

1 21. The method of claim 17, further comprising the
2 step of using the electronic reading device to select a
3 particular location on the specially formatted surface by
4 pressing the electronic reading device against the surface
5 above a predetermined force threshold.

1 22. The method of claim 15, further comprising the
2 step of identifying the specially formatted surface based
3 on the positional data.

1 23. An electronic reading device, comprising:
2 an optical detector for detecting positional
3 data for the electronic reading device with respect to an
4 address pattern of a specially formatted surface; and
5 writing means for writing on surfaces, wherein
6 the writing means can be selectively activated and
7 deactivated, the optical detector capable of detecting
8 positional data whether the writing means is activated or
9 deactivated.

1 24. The electronic reading device of claim 23,
2 wherein the specially formatted surface is preprinted with
3 at least one data entry field and the optical detector
4 facilitates entry of information corresponding to the at
5 least one data entry field.

ABSTRACT OF THE DISCLOSURE

A method and system for electronic entry of information uses an electronic reading device that includes an optical detector for detecting a portion of an address pattern on a specially formatted surface that is adjacent to the electronic reading device. The address pattern is designed such that an exact position of the electronic reading device with respect to the specially formatted surface can be determined by detecting only a small portion of the overall address pattern. The electronic reading device can include a sensor for detecting contact between a tip of the electronic reading device and the specially formatted surface. In addition, a processor in the electronic reading device receives the detected positional data at least when the sensor detects contact between the tip of the electronic reading device and the specially formatted surface. In addition or as an alternative, the electronic reading device can include a writing means that can be selectively activated and deactivated, wherein positions are detected regardless of whether the writing means is in an activated or deactivated mode.


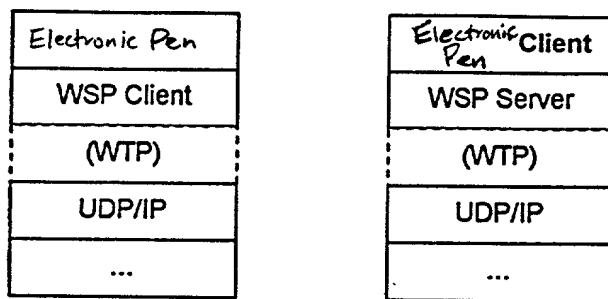


FIG. 3

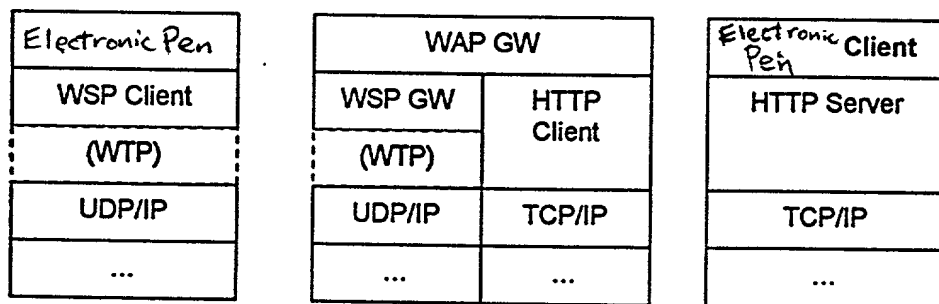


FIG. 4

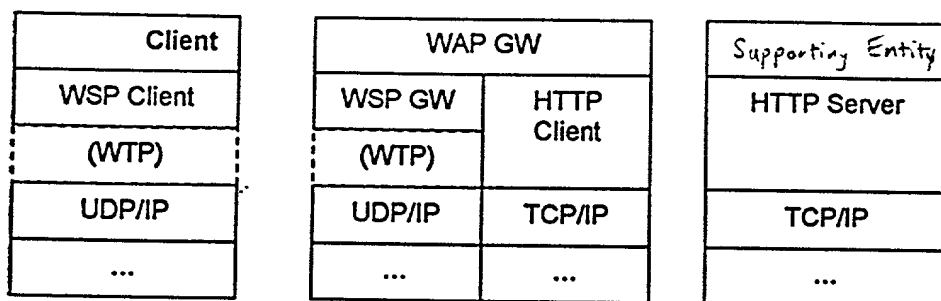


FIG. 5

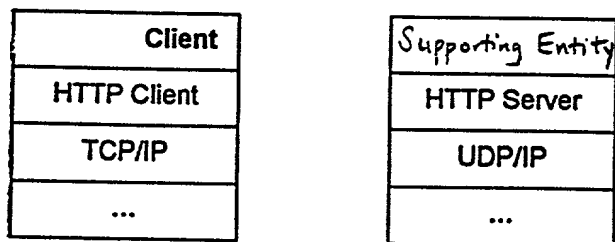


FIG. 6

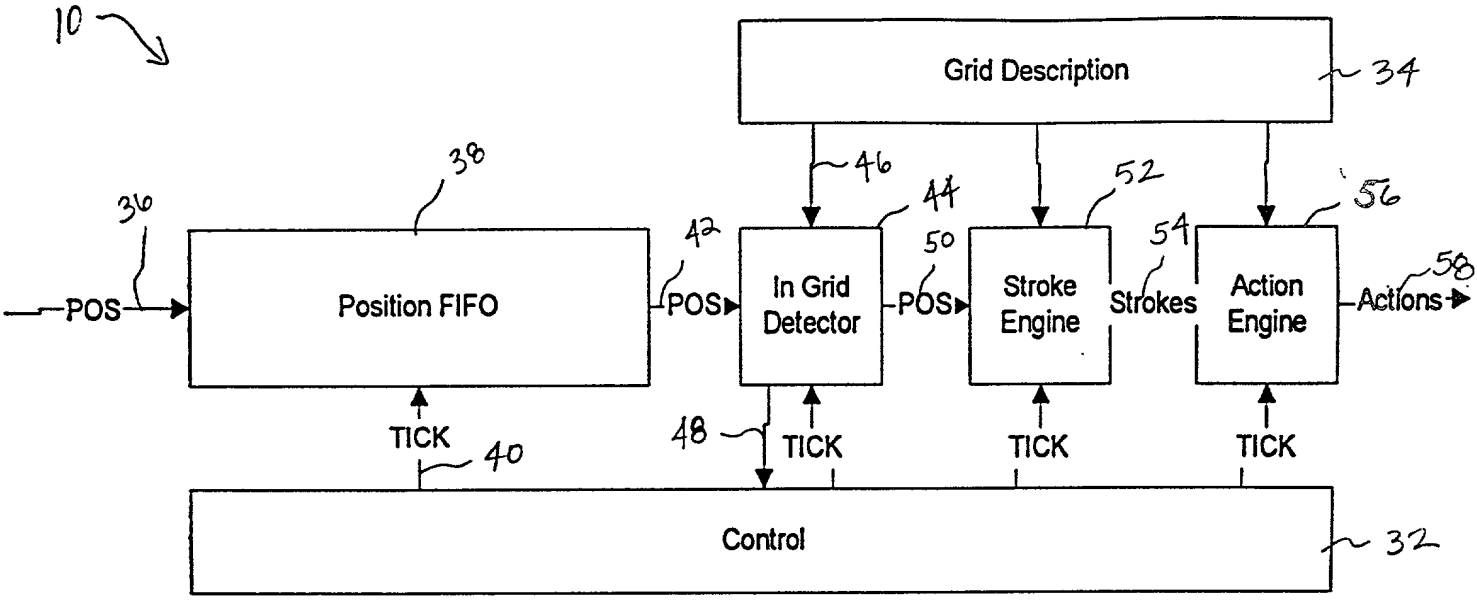


FIG. 7



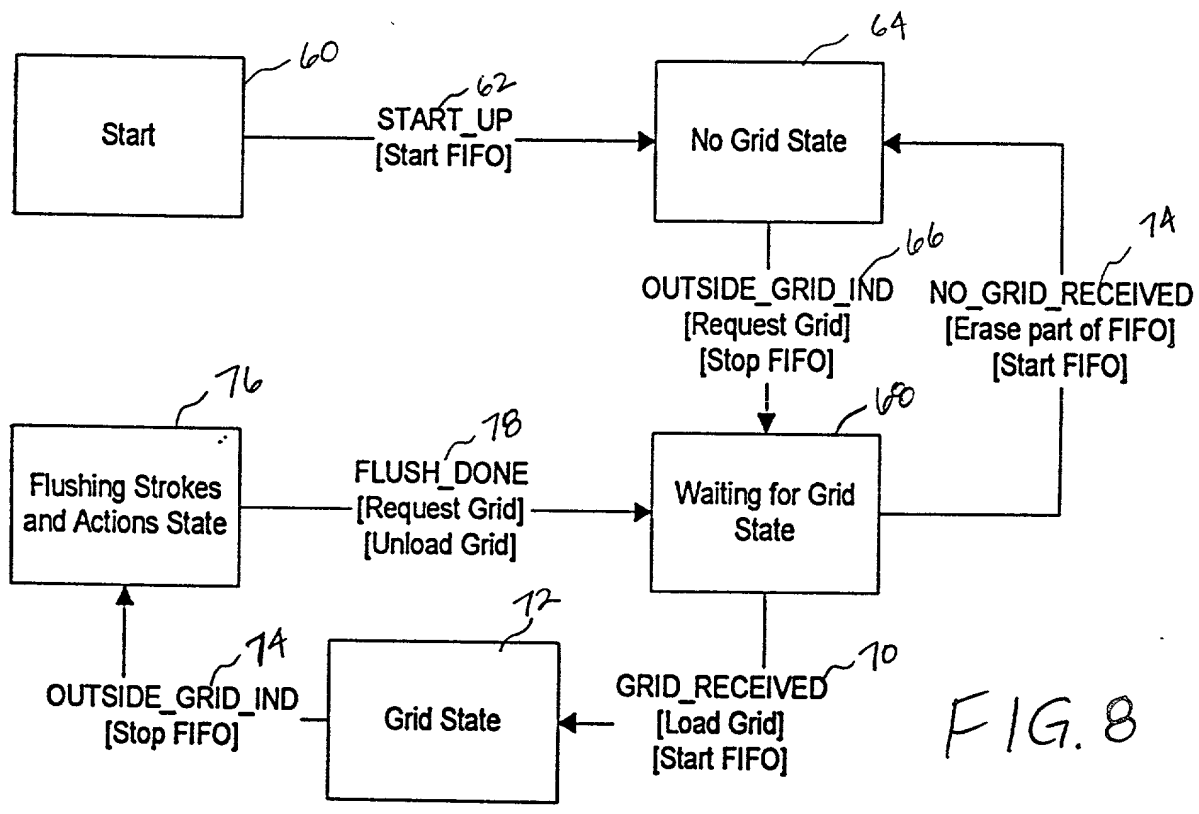


FIG. 8

0970494-103400

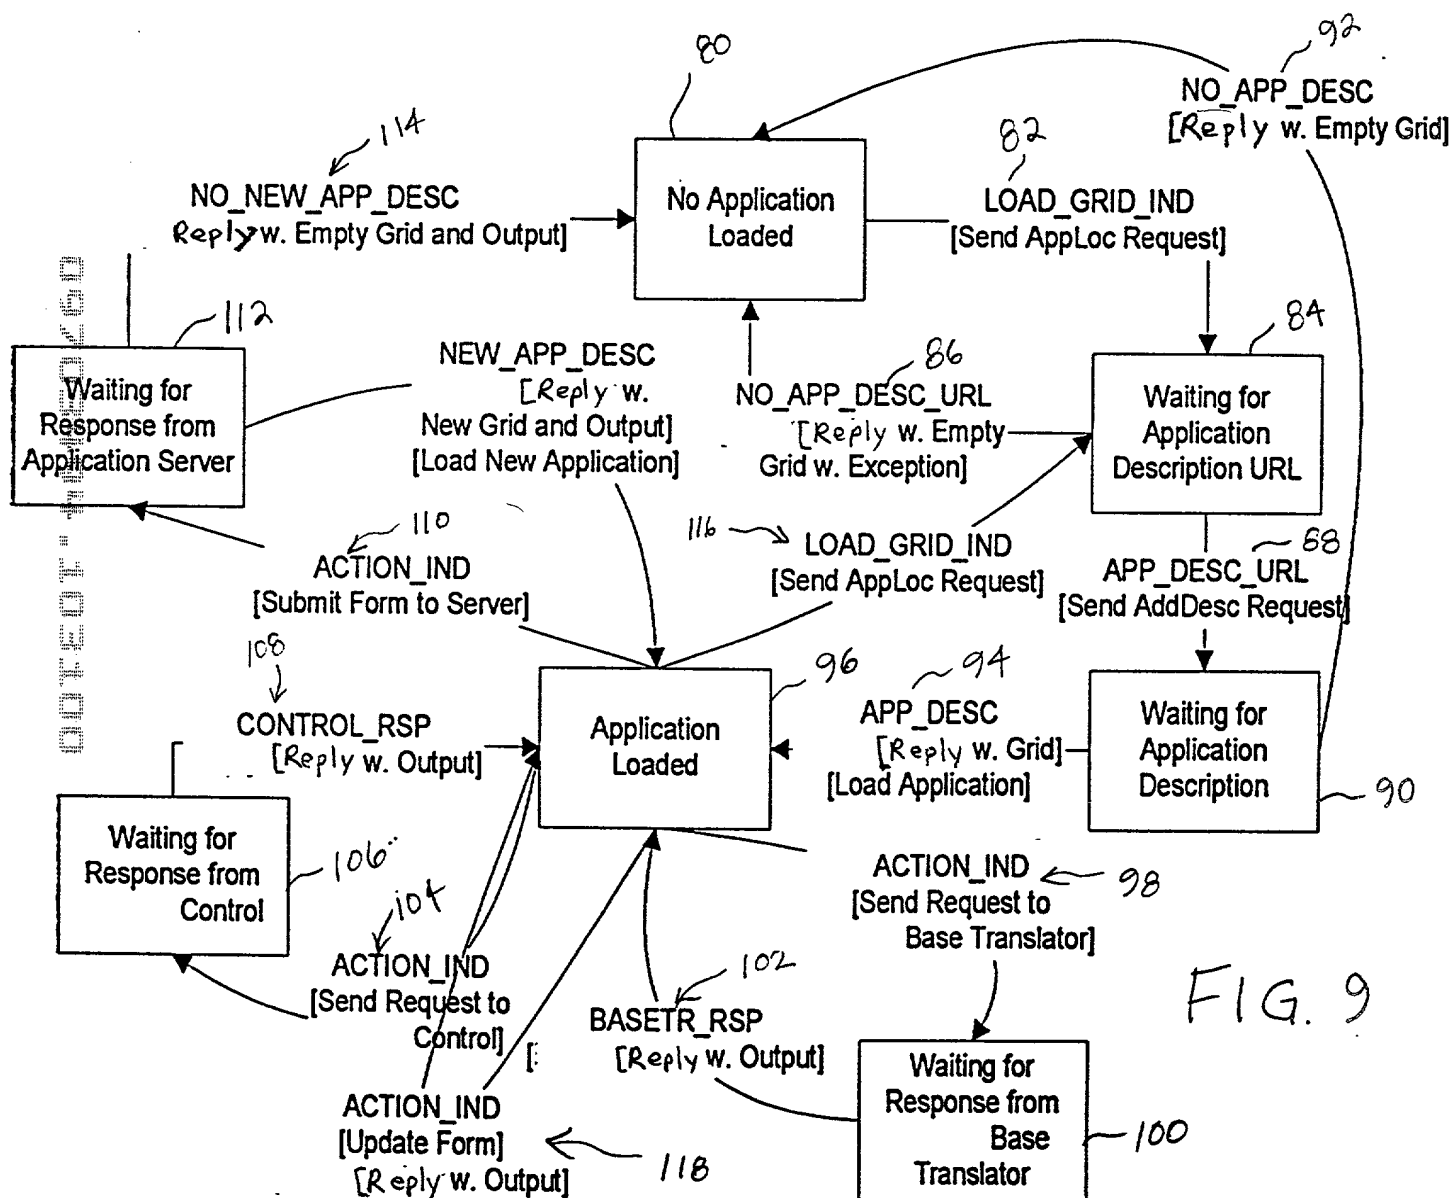

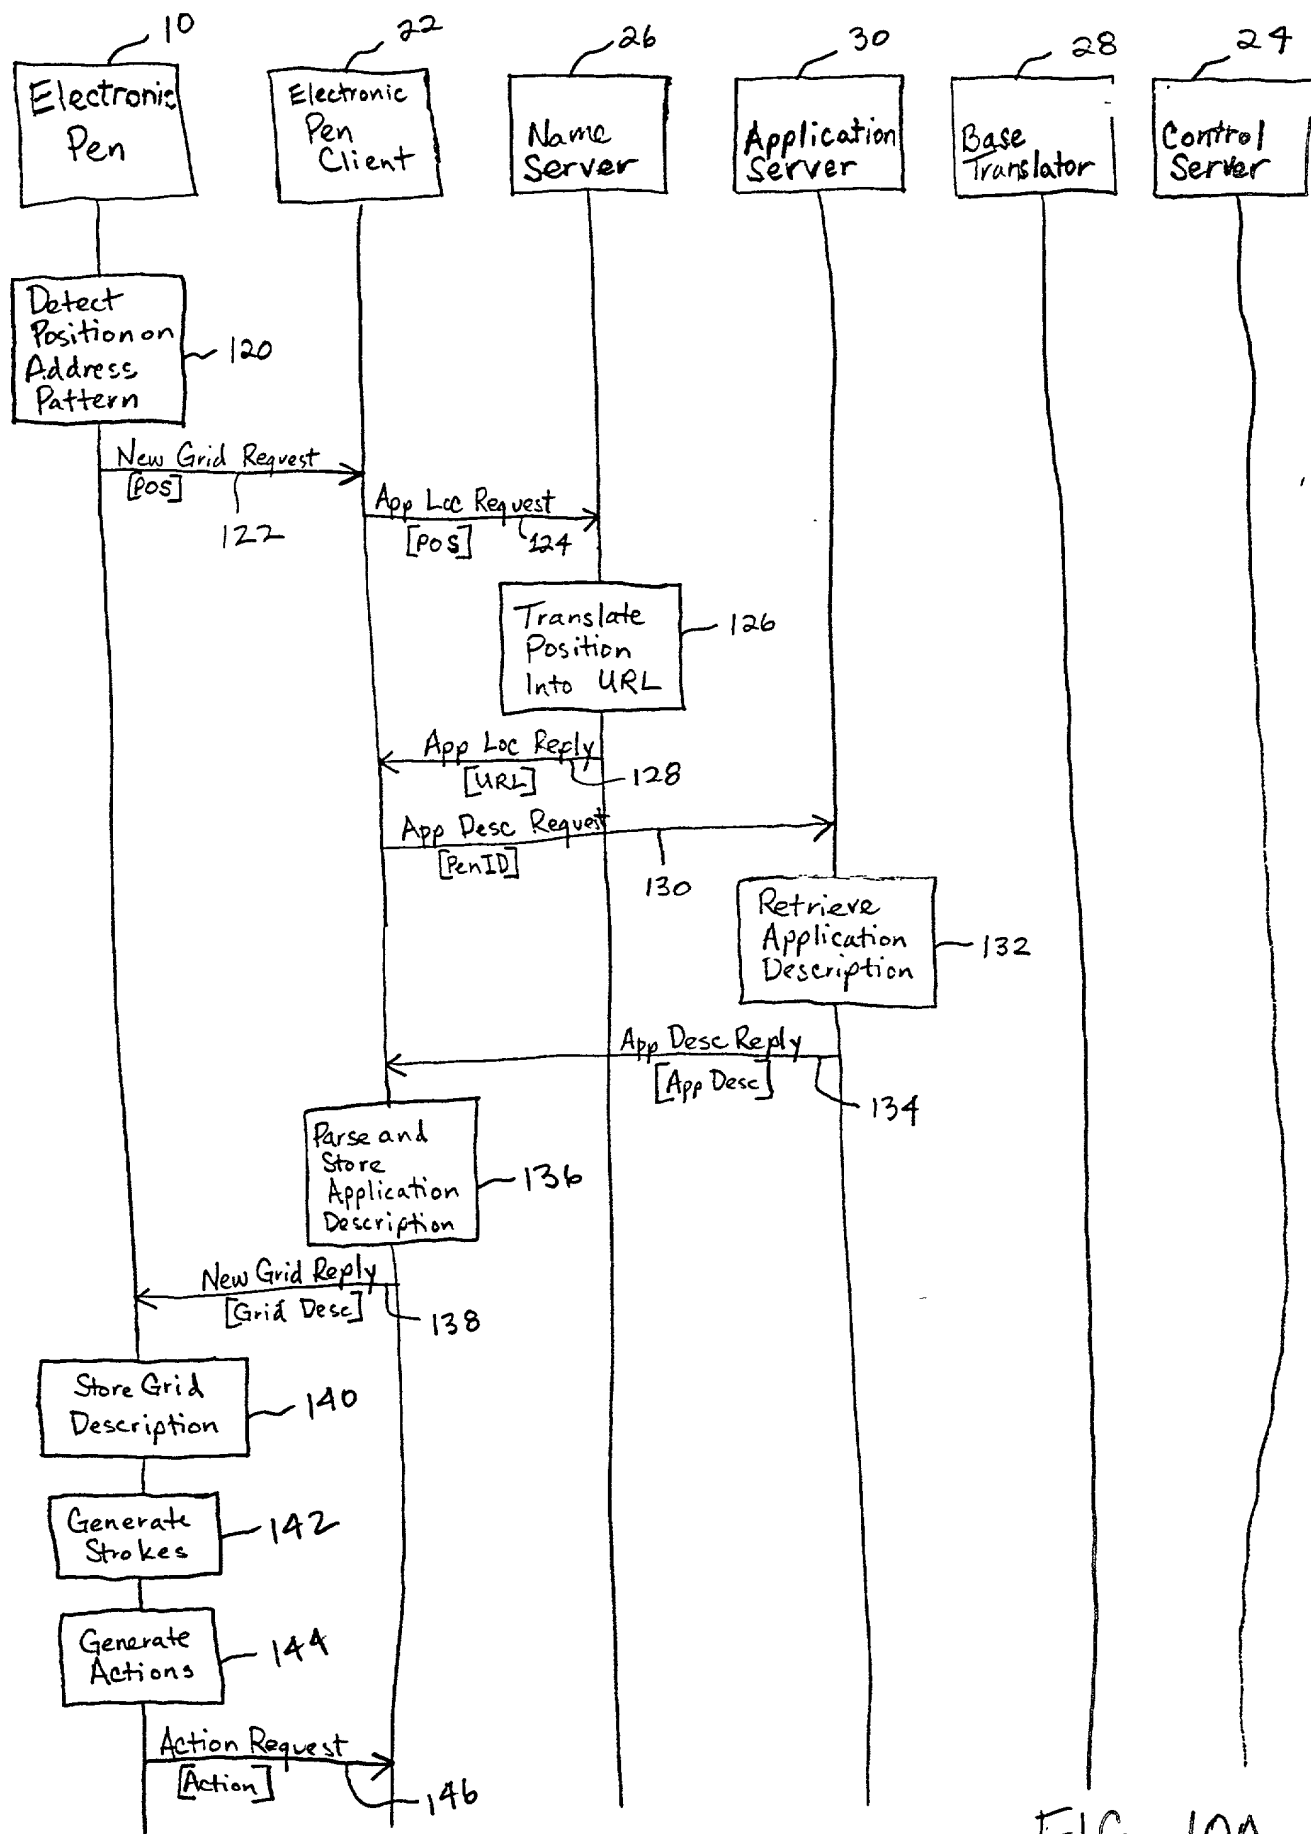

F|G. 10A

0070494-10100

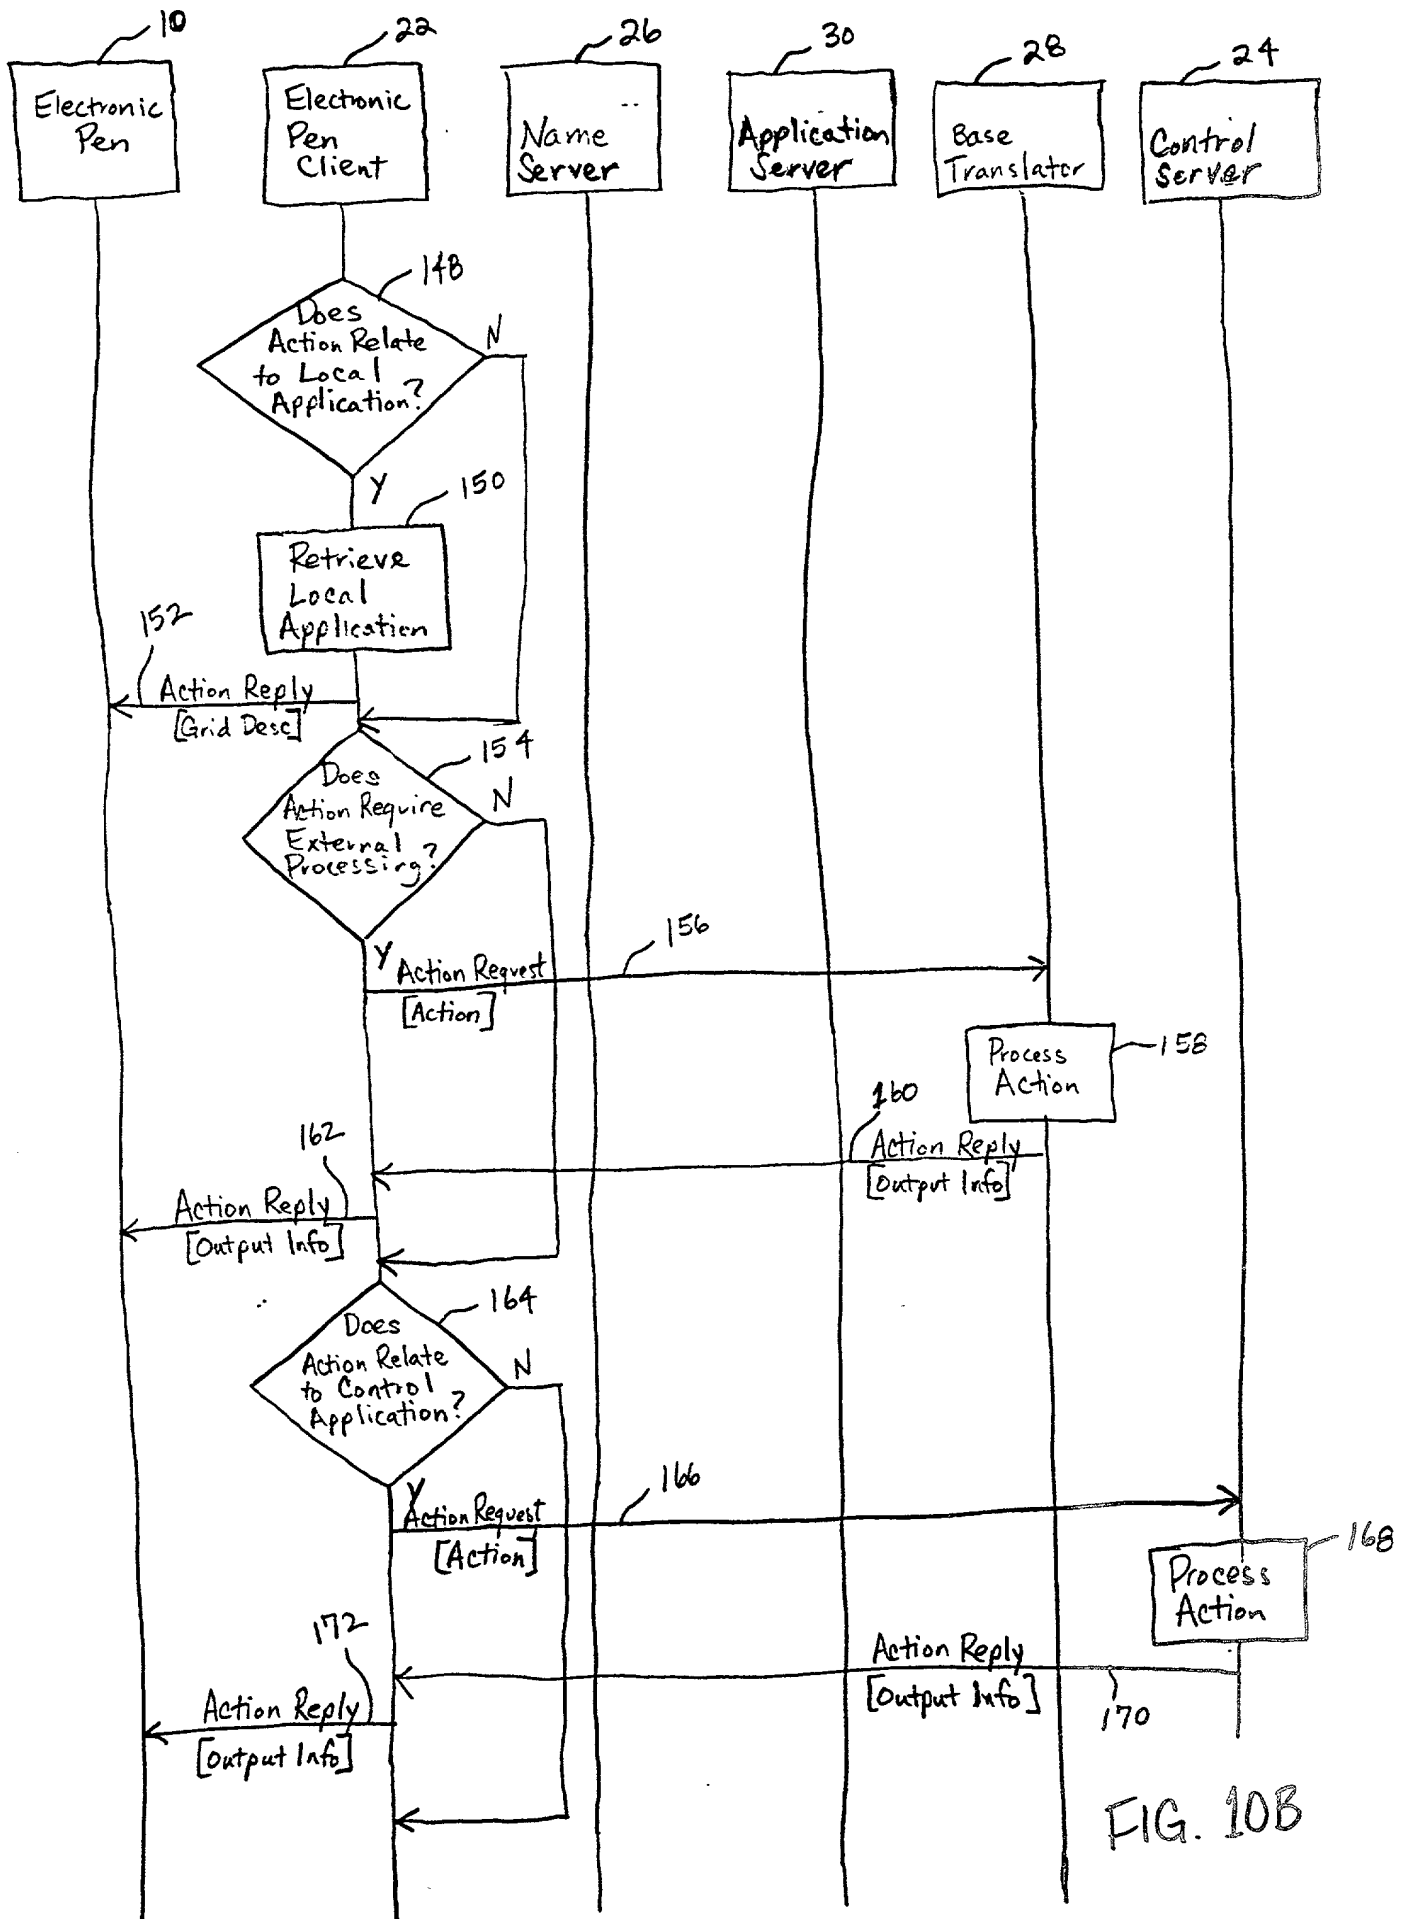


FIG. 10B

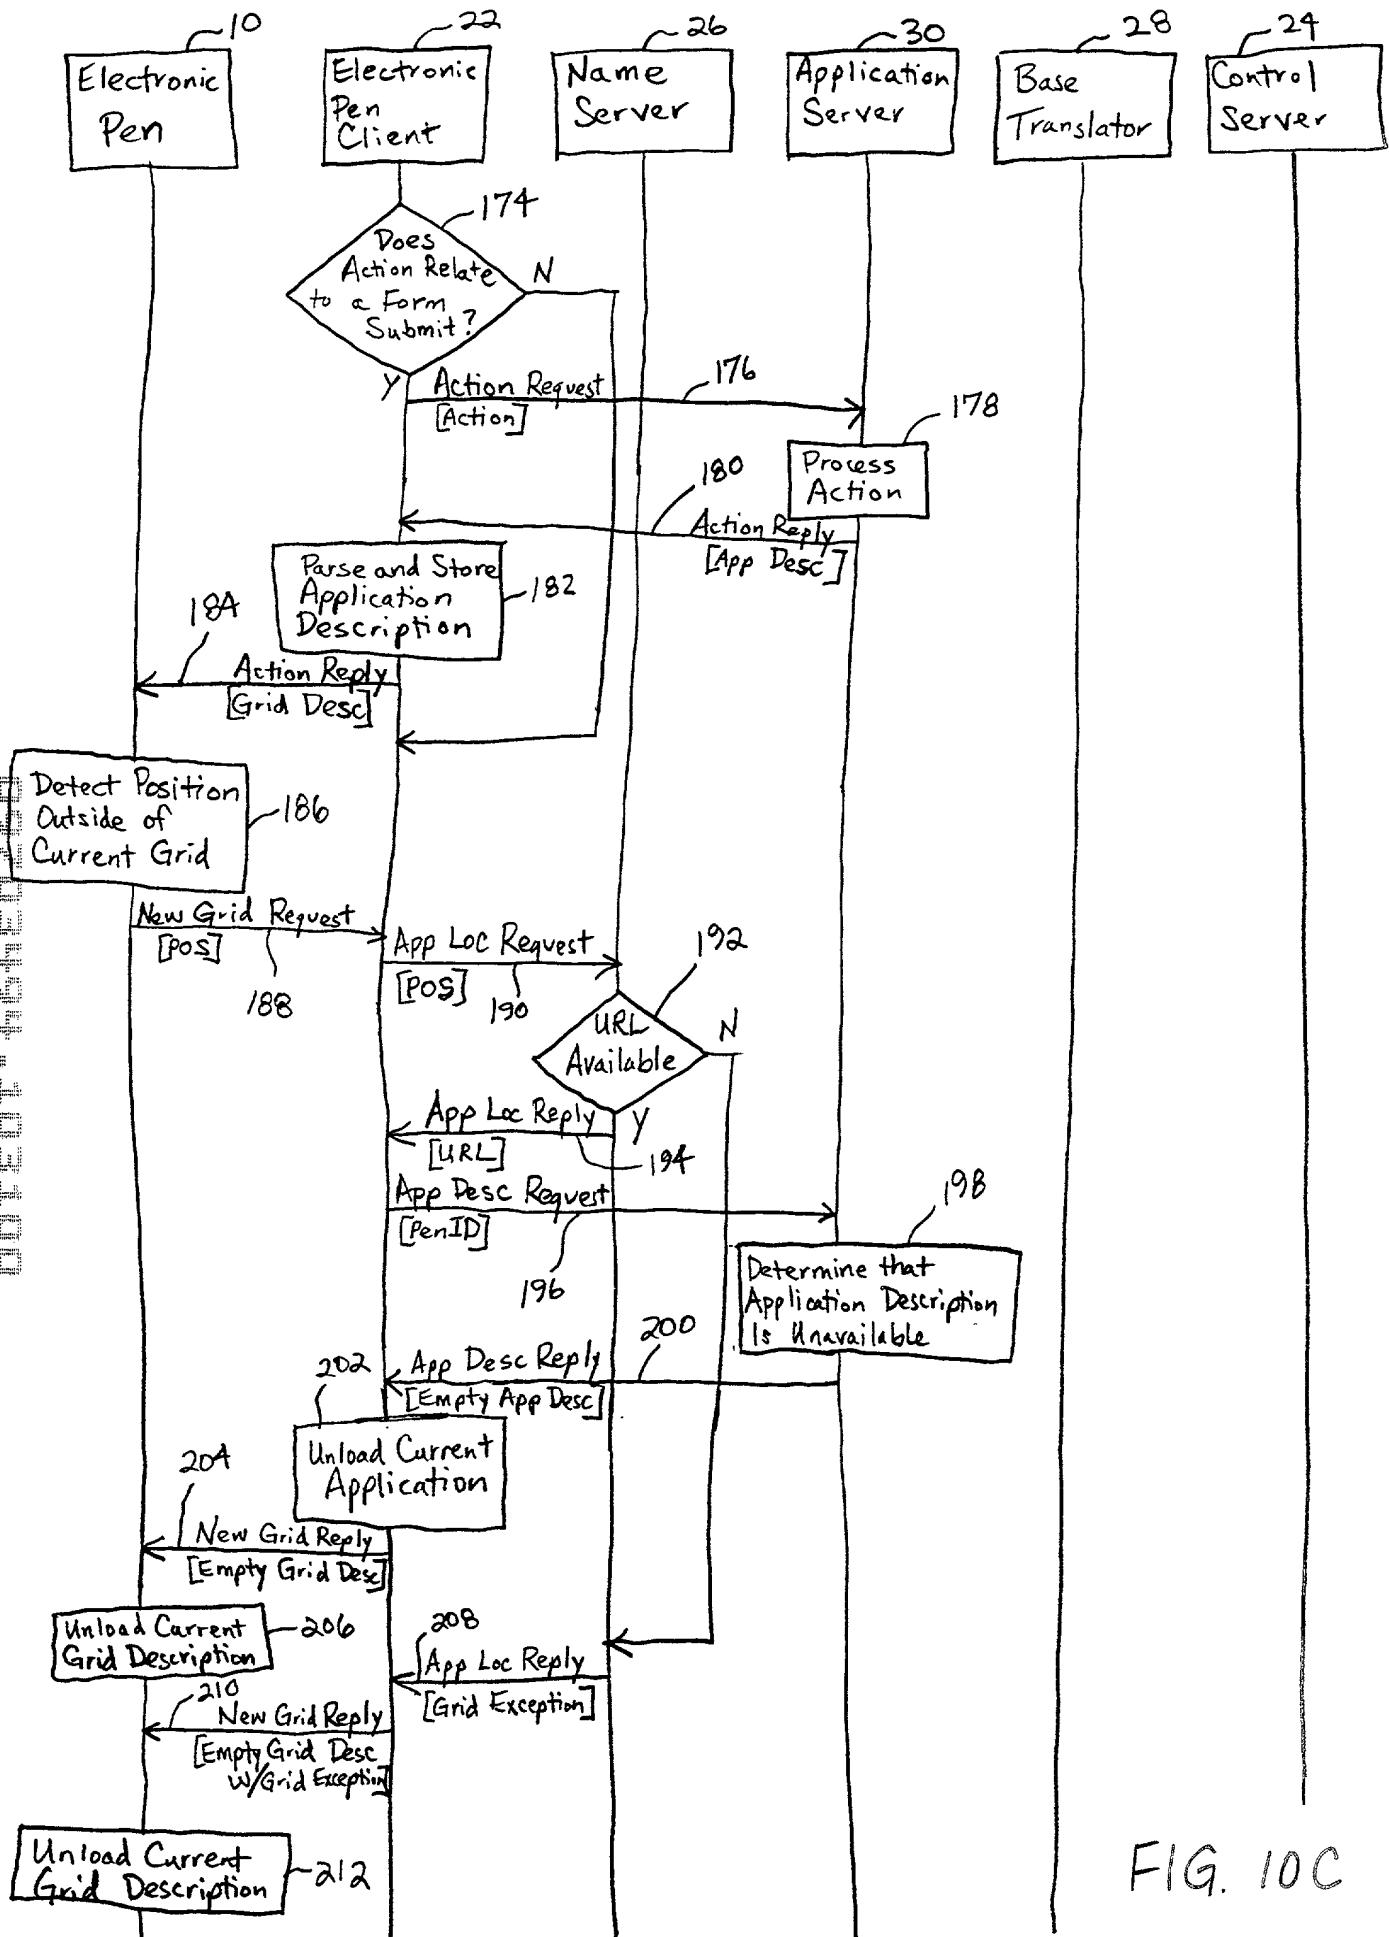


FIG. 10C

007044-403100

REUSABLE CALENDAR ENTRY SHEET (PLEASE NO INK)

← 220

DATE: ← 222
Day Mo. Yr.


	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	Sunday
0800							
1000							
1200							
1400							
1600							
1700							


← 224

FIG. 11

REUSABLE PHONE SETTINGS ENTRY SHEET (PLEASE NO INK)

← 226

Ring Volume  ← 228

Ring Melody  ← 230

Greeting ← 232

Phone Memory:

NAME	NUMBER

← 234

FIG. 12

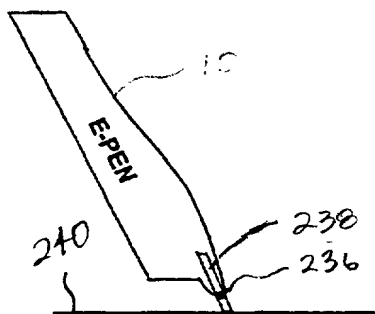


FIG. 13A

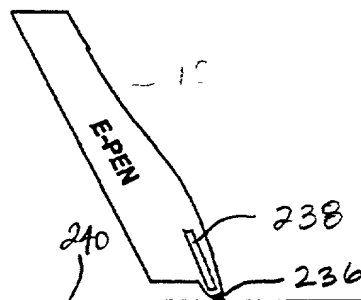


FIG. 13B

090344-103400

RULES 63 AND 67 (37 C.F.R. 1.63 and 1.67)
DECLARATION AND POWER OF ATTORNEY

FOR UTILITY/DESIGN/CIP/PCT NATIONAL APPLICATIONS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **ELECTRONIC PEN WITH INK ON/INK OFF FUNCTION AND PAPER TOUCH SENSING**, the specification of which:
(mark only one)

- ☐ (a) is attached hereto.
- ☐ (b) was filed on _ as Application Serial No. _ and was amended on _____ (if applicable)
- ☐ (c) was filed as PCT International Application No. PCT/_____ on _____ and was amended on _____ (if applicable).
- ☐ (d) was filed on _ as Application Serial No. _ and was issued a Notice of Allowance on _____.
- ☒ (e) was filed on October 31, 2000 bearing attorney docket number 34650-608PT.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above or as allowed as indicated above.

I acknowledge the duty to disclose all information known to me to be material to the patentability of this application as defined in 37 CFR § 1.56. If this is a continuation-in-part (CIP) application, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability of the application as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

I hereby claim foreign priority benefits under 35 U.S.C. § 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application

on which my priority is claimed or, (2) if no priority is claimed, before the filing date of this application:

PRIOR FOREIGN PATENTS

<u>Number</u>	<u>Country</u>	<u>Month/Day/Year</u> <u>Filed</u>	<u>Date first</u> <u>laid-open or</u> <u>Published</u>	<u>Date</u> <u>patented or</u> <u>Granted</u>	<u>Priority Claimed</u> <u>Yes</u> <u>No</u>
NONE					

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

PROVISIONAL APPLICATIONS

<u>Application No. (series code/serial no.)</u>	<u>Month/Day/Year Filed</u>
60/182,742	February 16, 2000
60/190,343	March 16, 2000
60/192,662	March 28, 2000

I hereby claim the benefit under 35 U.S.C. § 120/365 of any United States application(s) listed below and PCT international applications listed above or below:

PRIOR U.S. OR PCT APPLICATIONS

<u>Application No. (series code/serial no.)</u>	<u>Month/Day/Year Filed</u>	<u>Status(pending, abandoned, patented)</u>
NONE		

I hereby appoint:

TIMOTHY G. ACKERMANN, Reg. No. 44,493	GERALD H. GLANZMAN, Reg. No. 25,035	DANIEL G. NGUYEN, Reg. No. 42,933
BENJAMIN J. BAL, Reg. No. 43,481	J. KEVIN GRAY, Reg. No. 37,141	SPENCER C. PATTERSON, Reg. No. 43,849
MICHAEL J. BLANKSTEIN, Reg. No. 37,097	STEVEN R. GREENFIELD, Reg. No. 38,166	RUSSELL N. RIPPAMONTI, Reg. No. 39,521
MARY JO BOLDINGH, Reg. No. 34,713	JOSHUA A. GRISWOLD, Reg. No. 46,310	ROSS T. ROBINSON, Reg. No. 47,031
MARGARET A. BOULWARE, Reg. No. 28,708	J. PAT HEPTIG, Reg. No. 40,643	STEPHEN G. RUDISILL, Reg. No. 20,087
ARTHUR J. BRADY, Reg. No. 42,356	SHARON A. ISRAEL, Reg. No. 41,867	HOLLY L. RUDNICK, Reg. No. 43,065
MATTHEW O. BRADY, Reg. No. 44,554	JOHN R. KIRK JR., Reg. No. 24,477	J.L. JENNIE SALAZAR, Reg. No. 45,065
DANIEL J. BURNHAM, Reg. No. 39,618	PAUL R. KITCH, Reg. No. 38,206	KEITH W. SAUNDERS, Reg. No. 41,462
THOMAS L. CANTRELL, Reg. No. 20,849	TIMOTHY M. KOWALSKI, Reg. No. 44,192	JERRY R. SELINGER, Reg. No. 26,582
RONALD B. COOLLEY, Reg. No. 27,187	JAMES F. LEA III, Reg. No. 41,143	ZACHARY J. SMOLINSKI, Reg. No. 47,100
THOMAS L. CRISMAN, Reg. No. 24,846	HSIN-WEI LUANG, Reg. No. 44,213	GARY B. SOLOMON, Reg. No. 44,347
STUART D. DWORK, Reg. No. 31,103	ROBERT W. MASON, Reg. No. 42,848	STEVE Z. SZCZEPANSKI, Reg. No. 27,957
WILLIAM F. ESSER, Reg. No. 38,053	ROGER L. MAXWELL, Reg. No. 31,855	ANDRE M. SZUWALSKI, Reg. No. 35,701
ROGER J. FRENCH, Reg. No. 27,786	ROBERT A. McFALL, Reg. No. 28,968	ALAN R. THIELE, Reg. No. 30,694
JANET M. GARETTO, Reg. No. 42,568	STEVEN T. McDONALD, Reg. No. 45,999	TAMSEN VALOIR, Reg. No. 41,417
JOHN C. GATZ, Reg. No. 41,774	LISA H. MEYERHOFF, Reg. No. 36,869	RAYMOND VAN DYKE, Reg. No. 34,746
RUSSELL J. GENET, Reg. No. 42,571	STANLEY R. MOORE, Reg. No. 26,958	BRIAN D. WALKER, Reg. No. 37,751
	RICHARD J. MOURA, Reg. No. 34,883	GERALD T. WELCH, Reg. No. 30,332
	MARK V. MULLER, Reg. No. 37,509	HAROLD N. WELLS, Reg. No. 26,044
	P. WESTON MUSSELMAN JR. Reg. No. 31,644	WILLIAM D. WIESE, Reg. No. 45,217

all of the firm of **JENKENS & GILCHRIST, a Professional Corporation**, 1445 Ross Avenue, Suite 3200, Dallas, Texas 75202-2799, as my attorneys and/or agents, with full power of substitution and revocation, to prosecute this application, provisionals thereof, continuations, continuations-in-part, divisionals, appeals, reissues, substitutions, and extensions thereof and to transact all business in the United States Patent and Trademark Office connected therewith, to appoint any individuals under an associate power of attorney and to file and prosecute any international patent application filed thereon before any international authorities, and I hereby authorize them to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization who/which first sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct them in writing to the contrary.

Please address all correspondence and direct all telephone calls to:

Richard J. Moura, Esq.
Jenkins & Gilchrist, P.C.
1445 Ross Avenue, Suite 3200
Dallas, Texas 75202-2799
214/855-4500
214/855-4300 (fax)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAMED INVENTOR(S)

1	Nils Rydbeck		
	Full Name	Inventor's Signature	Date
	202 Rutherglen Drive Cary, North Carolina 27511 Sweden Residence (city, state, country) Citizenship		
	202 Rutherglen Drive Cary, North Carolina 27511 Post Office Address (include zip code)		

(FOR ADDITIONAL INVENTORS, check here ___ and add additional sheet for inventor information regarding signature, name, date, citizenship, residence and address)